

Observing Handbook No. 1

Marine Surface Weather Observations



Synoptic Code Symbols with Range of Values

$\begin{array}{c} \textbf{BBXX} \\ \textbf{DD} \\ \textbf{YY} \\ \textbf{GG} \\ \textbf{i}_w \\ \textbf{L}_a \textbf{L}_a \textbf{L}_a \\ \textbf{Q}_c \\ \textbf{L}_o \textbf{L}_o \textbf{L}_o \textbf{L}_o \\ \textbf{i}_R \end{array}$	Ship Weather Report Indicator Radio call sign Day of the month Time of observation Wind indicator Latitude Quadrant Longitude Precipitation data indicator	BBXX Call Sign 01-31 00-23 3, 4 000-900 1, 3, 5, 7 0000-1800 4
i _x	Weather data indicator	1, 3
h	Cloud base height	0-9, /
VV	Visibility	90-99
N dd	Cloud cover Wind direction	0-9, / 00-36, 99
ff	Wind speed	00-36, 99
fff	High Speed Wind	Knots (099-)
S _n	Sign of temperature	0, 1
TÏT	Dry bulb temperature	Celsius Degrees
$T_dT_dT_d$	Dew point temperature	Celsius Degrees
PPPP	Sea level pressure	Actual Hp or Mb
		(omit 1 in thousandths)
а	3-hour pressure tendency	0-8
ppp ww	3-hour pressure change Present weather	Hp or Mb 00-99
W ₁	Past weather (primary)	0-9
W_2	Past weather (secondary)	0-9
N _h	Lowest cloud cover	0-9, /
C _L	Low cloud type	0-9, /
C _M	Middle cloud type	0-9, /
Сн	High cloud type	0-9, /
D _s	Ship's course	0-9
V _s	Ship's average speed	0-9
S _s	Sign/type sea surface temp. Sea surface temp.	0-7 Celsius Degrees
T _W T _W T _W P _W P _W	Sea period	Seconds
H _W H _W	Sea height	Half Meters
d _{W1} d _{W1}	Primary swell direction	01-36, 99
$d_{W2}d_{W2}$	Secondary swell direction	01-36, 99, //
$P_{W1}P_{W1}$	Primary swell period	Seconds
$H_{W1}H_{W1}$	Primary swell height	Half Meters
P _{W2} P _{W2}	Secondary swell period	Seconds
H _{W2} H _{W2}	Secondary swell height	Half Meters
l _s	Ice accretion cause on ship Ice accretion thickness on ship	1-5 Centimeters
E _s E _s R _s	Ice accretion thickness on ship	0-4
S _w	Sign/type wet bulb temp.	0-7
$T_{b}^{w}T_{b}T_{b}$	Wet bulb temp.	Celsius Degrees
c _i	Sea ice concentration	0-9, /
Si	Sea ice development	0-9, /
b _i	Ice of land origin	0-9, /
D _i	Ice edge bearing	0-9, /
$\mathbf{z_i}$	Ice trend	0-9, /





National Weather Service Observing Handbook No. 1

Marine Surface Weather Observations

May 2010

U.S. DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
National Weather Service
National Data Buoy Center
Building 1007
Stennis Space Center, MS 39529-6000

Preface

In writing this new edition of NWS Observing Handbook No. 1 it has been our intent to include as much useful information as possible in the available space. The compact size and design, and "field guide" format, should allow for easy handling and quick reference. We hope this simplifies your work as weather observers, and makes it easier to locate the information you need.

Weather has an almost magical hold on the mariner. Every change in the weather at sea is noted with a sense of trepidation. Reporting weather not only contributes to your safety, but adds to your basic knowledge of seamanship. It is part of keeping a good lookout.

For every 100 observations on land, there is only about 1 observation at sea. Without your participation in the Voluntary Observing Ship (VOS) program, there would be vast marine areas without data, making weather forecasting nearly impossible for these areas. The importance of ship reports cannot be overstated. We thank ships officers for their fine work, dedication, and commitment.

Please follow the weather reporting schedule for ships as best you can (0000, 0600, 1200, 1800 UTC from all areas; every 3-hours from the Great Lakes, from within 200 miles of the United States and Canadian coastlines, and from within 300 miles of named tropical storms or hurricanes). For assistance, contact a Port Meteorological Officer (PMO), who will come aboard your vessel and provide all the information you need to observe, code, and transmit weather (see page 1-2 through 1-5).

Table of Contents

iii	Preface
vii	Introduction
1-1	Chapter 1: Program Description
2-1	Chapter 2: Ship's Synoptic Code and Observing Methods
3-1	Chapter 3: Transmitting the Observation
4-1	Chapter 4: The Weatherwise Mariner
5-1	Glossary
A-1	Appendix A: Observing Forms and Supplies
B-1	Appendix B: Conversion Factors and Equivalents
C-1	Appendix C: Interpretation of Weather Map Symbols

Introduction

For beginners and established observers alike, this new edition of the National Weather Service Observing Handbook No. 1 (NWSOH1) explains how to observe, how to code, and how to transmit weather observations from moving ships at sea.

IMPORTANCE OF OBSERVATIONS FROM SHIPS

Accomplishments in the atmospheric sciences have their roots in observations. They are a critical first step in the end-to-end forecast process. This process consists of the taking and coding of observations, the transmission and receipt of data, the processing and analysis of data (including numerical and computer modeling), followed by the preparation and issuance of forecasts and warnings.

More specifically, observations are used by meteorologists to evaluate your local weather conditions, and to locate and determine the strength of weather systems such as fronts, air masses, high and low pressure systems, tropical storms, and hurricanes. Your observations are especially important in the preparation of the surface weather chart. Isobars (lines of equal barometric pressure), which are crucial for defining and delineating all weather systems, could not be drawn over marine areas without ship reports.

Ships observations are not only important for weather forecasts at sea, but also for forecasts over land areas, because marine weather systems often move inland. Notable examples include (1) North Pacific Ocean weather systems, which frequently move eastward to effect the weather over much of North America, especially during the winter season, (2) tropical storms and hurricanes, which develop over the oceans, and can cause great devastation over highly populated coastal areas, (3) weather systems over the North Atlantic Ocean, which have a great impact on the weather of Europe.

Accurate marine data is also used to prepare long range forecasts of climate, temperature, and precipitation, in the monitoring of climatic change, ocean currents, and eddies, and to study the interaction of air and sea. This is important for agriculture, industrial planning, ship routing, fishing, and many other activities. Pilot charts and climatological atlases of the oceans are largely based on observations from ships. Your weather observations will also help you interpret the forecast and changes in weather that occur at your position or along your route.

ELEMENTS TO BE OBSERVED

Ships taking meteorological observations should be familiar with the methods for observing or measuring the following elements:

(1) Cloud height, amount, and type;

- (2) Visibility;
- (3) Wind speed and direction;
- (4) Air and wet-bulb temperatures, and dew point;
- (5) Atmospheric pressure, tendency and its characteristic;
- (6) Weather present and past;
- (7) Course and speed of ship;
- (8) Sea surface temperature;
- (9) Sea waves and swell period, direction, and height;
- (10) Ice conditions, including icing on board ship;

EQUIPMENT REQUIRED

Suitable instruments for use on ships are the following:

- (1) Precision aneroid barometer or digital electronic barometer;
- (2) Dry and wet-bulb psychrometer (sling, or housed in an outdoor shelter);
- (3) Barograph;
- (4) Sea temperature thermometer, either a continuously immersed sensor (intake or hull mounted) or sea water bucket;

An anemometer to measure wind force may be used as an alternative to visual wind estimates using the Beaufort scale.

OBSERVING ORDER

In general, instrumental observations requiring the use of a light should be made after non-instrumental ones, so that eye function in the dark is not impaired. Efforts should be made to observe elements other than pressure within the ten minutes preceding the reporting hour. Ideally, atmospheric pressure should be read at exactly the standard time.

HISTORICAL NOTE

Since the invention of meteorological instruments did not begin until the seventeenth century, instrumental records of the weather elements cover little more than 200 years anywhere, while for many parts of the world, the period of observation is a good deal less than 100 years. The best records are available from well-populated land areas.

Notable inventions include the air thermometer (Galileo, 1592), alcohol and mercury thermometer (Fahrenheit, 1714), the mercury barometer (Torricelli, 1643), the aneroid barometer (Vidie, 1843), and the anemometer (Hooke, 1667).

During the eighteenth and nineteenth centuries, mariners began keeping weather and oceanographic records and logs. Knowledge of prevailing winds and ocean currents came about as a result of these records. The Voluntary Observing Ship (VOS)

Program as we know it today is rooted in the work of Mathew Fontaine Maury, head of the U.S. Navy Hydrographic Office, who organized a meeting in Brussels in 1853, attended by delegates of ten major maritime nations. The purpose of the meeting was to discuss the establishment of a uniform system for the collection of marine meteorology and oceanography data, and the use of these data for the benefit of shipping in return.

The VOS program was recognized in 1948 in the International Convention For The Safety Of Life At Sea (SOLAS):

The contracting governments undertake to encourage the collection of meteorological data by ships at sea and to arrange for their examination, dissemination and exchange in the manner most suitable for the purpose of aiding navigation. Administrations shall encourage the use of instruments of a high degree of accuracy, and shall facilitate the checking of such instruments upon request.

HAVE YOUR INSTRUMENTS ADJUSTED AND REPORT ACCURATE DATA

Always ensure that your equipment is accurate and properly adjusted. A PMO should adjust your barometer and barograph once every $3-6\,$ months, and also check your psychrometer during every ship visit. Sea-water thermometers (whether hull-mounted or located in the condenser intake) should be calibrated annually, and checked every time your vessel is in the yard for service. If your vessel has an anemometer, it should be calibrated once every 6 months (U.S. PMOs do not perform this service). Make sure the anemometer is located where the ships superstructure will not interfere with the air motion.

When observing and recording data, always proceed in a very careful and meticulous manner. An inaccurate observation can mislead the forecaster and result in an incorrect forecast. On the other hand, a reliable observation can hold the key to an obscure or complex meteorological condition. When recording dry and wet bulb temperatures, always take your psychrometer to the windward side of the ship. This allows contact with air fresh from the sea which has not passed over the deck prior to your measurement.

Accuracy is not only important for forecasting — it is also very important for climatological purposes and for investigators who may use your observations at a later time. A few inaccurate observations can bias results and cause erroneous conclusions. A researcher has little to go by when deciding about the accuracy of a particular observation, and must depend on the competence of the observer aboard ship.

TRANSMIT REPORTS WITHOUT DELAY (REAL-TIME)

Always transmit your observations without delay as soon as possible after you've observed the data. Ship reports are used to indicate current, up-to-date conditions at your vessel (so called real-time conditions). Make your observation as close to the

reporting hour as you can. Any transmission problems or difficulties with radio stations should be reported back to your PMO, and written in the appropriate space on the back of WS Form B-81 (Ships Weather Observations), if used.

Report arrival times tend to be later at night and for Southern Hemisphere reports. Timely submission of these reports is most important.

Data is most readily available from the main shipping routes in both hemispheres. There is a chronic shortage of data from coastal waters out 200 miles (for this reason, 3-hourly reports are requested from U.S. and Canadian waters out 200 miles from shore). There is also a widespread shortage of data from the Southern Hemisphere and from the arctic ocean. More data is also needed from the tropics and easterly trade wind belt (5-35? N), especially during the N. Hemisphere hurricane season (May - November). From the North Atlantic and North Pacific oceans, more data is needed at 0600 and 1200 UTC (these are late night and early morning times). If you are operating from a data-sparse area, please report weather regularly.

Chapter 1 — Program Description

THE VOLUNTARY OBSERVING SHIP PROGRAM

The Voluntary Observing Ship (VOS) program is organized for the purpose of obtaining weather and oceanographic observations from moving ships. An international program under World Meteorological Organization (WMO) auspices, the VOS has over 5000 vessels participating from 23 nations. It is part of the WMO Global Observing System of the World Weather Watch.

The United States National Weather Service (NWS) VOS program is the largest in the world with over 600 vessels participating. It closely follows WMO guidelines for VOS programs. The U.S. program is supported by 11 full-time Port Meteorological Officers (PMOs) in New York, Baltimore, Norfolk, Jacksonville, Port Everglades, New Orleans, Houston, Los Angeles, Seattle, Charleston and Duluth), and 4 part-time PMOs (in Honolulu, Anchorage, Oakland, Kodiak, and Valdez). The national program office located at Stennis Space Center, MS manages the program and oversees PMO activities. Observing forms, handbooks, supplies, and operating instructions are prepared at the program office. The national office also maintains a VOS Program Computerized Data Management System to record PMO ship visits, vessel mailing addresses, vessel equipment inventories, and information about vessel reports. All U.S. PMOs have direct access to this database.

Both U.S. and foreign flag vessels participate in the U.S. VOS program. Any vessel willing to take and transmit observations in marine areas can join the program.

The WMO establishes the ships synoptic code, and procedures and standards for the collection and dissemination of observations worldwide. The WMO also maintains information about countries and vessels participating in the program (available in WMO Publication No. 47, International List Of Selected, Supplementary, And Auxiliary Ships).

WMO SHIPS' SYNOPTIC CODE, FM 13-X

Coded messages are used for the international exchange of meteorological information. This is because code makes it practical to understand and process data, manually or by computer, for real-time use or later compilation into climatological records. The code also allows data to be transferred internationally at high speed, on special data circuits known as the Global Telecommunications System (GTS).

The WMO code form Code FM 13-X is the ships' synoptic code, used by weather reporting ships. The code form is composed of a set of symbolic letters

(actually groups of letters) representing meteorological elements. Examples of symbolic letter groups include Nddff snTTT etc. To report weather, the symbolic letters are transcribed into figures indicating the value or state of the elements described. Code tables are often used to specify the appropriate values of the different symbolic letters. See Chapter 2.

Universal code has been called the twentieth century's greatest improvement in the collection of meteorological data. Prior to code standardization, lack of consistency and difficulty deciphering observations posed enormous problems for the meteorologist.

Code forms and specifications are determined by international agreement at WMO committee meetings, usually held in Geneva. Codes are changed occasionally to meet operational needs — the last major change was in January 1982. Some minor changes were made in November, 1994.

STANDARD WEATHER REPORTING SCHEDULE FOR SHIPS

The worldwide weather reporting schedule for Voluntary Observing Ships is 4 times daily — at 0000, 0600, 1200, and 1800 UTC. These are the "main synoptic" times, when weather forecasts are prepared and, therefore, when data is needed most. Two of these times, 0000 and 1200 UTC, are most important — when the numerical weather prediction models are initialized with data and also when soundings are released from upper air stations all over the world. Reporting weather once every 3 hours when within 300 miles of a named tropical storm or hurricane is also standard practice worldwide. Storm (wind speed 48 knots or higher) or special reports for conditions not forecast, much worse than forecast, or for sudden weather changes) should be sent whenever conditions warrant.


3-HOURLY WEATHER REPORTING SCHEDULE

Vessels operating on the Great Lakes, and within 200 miles of the U.S. or Canadian coastlines (including the coasts of Alaska, Hawaii, and Gulf coast states), are asked to transmit their observations once every three hours — at 0000, 0300, 0600, 0900, 1200, 1500, 1800, and 2100 UTC. This special schedule is maintained because of a data shortage from near-shore areas. All weather reports are voluntary — try to follow the recommended reporting schedule as best you can. Always give top priority to reports at the main synoptic hours (6- hour intervals). When shipboard routine permits, follow the 3-hour schedule from coastal waters.

PORT METEOROLOGICAL OFFICERS (PMOS)

Port Meteorological Officers (PMOs) spend most of their time visiting ships in support of the VOS program. This is to encourage vessels to report weather; to instruct observers about procedures and the use of code; to provide observing supplies,

handbooks, and instructions; to adjust equipment; and, in some cases, to install, on loan, meteorological instrumentation. A top priority of the PMO is recruiting new vessels into the VOS program. When the PMO comes aboard your vessel, remember to ask questions about observing, coding, and reporting weather. If you're in the VOS program, keep the PMO informed about changes to your contact information (mailing address e-mail address etc). Discuss weather forecasts, warnings, and facsimile products with the PMO — especially any specific problems you've had. The PMO will contact the appropriate party for investigation and corrective action. If you have any suggestions to improve the VOS program, make them known to the PMO.

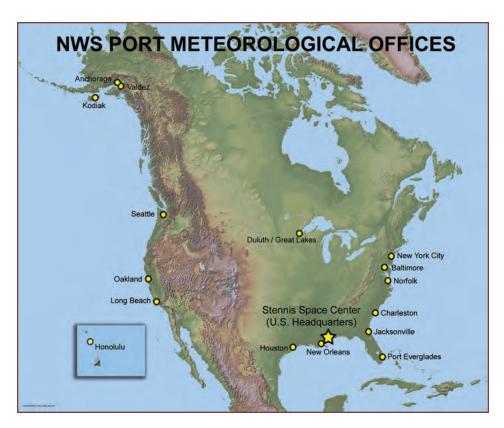

More information about the Voluntary Observing Ship Program and Port Meteorological Officers is available on the Worldwide Web at http://www.vos.noaa.gov.

LOCATIONS OF U.S. PMOS

HEADQUARTERS

Voluntary Observing Ship Program National Data Buoy Center Building Bldg. 3203 Stennis Space Center, MS 39529-6000 E-mail: vos@noaa.gov

ATLANTIC PORTS

PMO Miami, FL National Weather Service, NOAA 2550 Eisenhower Blvd, Suite 312 P.O. Box 165504 Port Everglades, FL 33316 E-mail: pmomia@noaa.gov

PMO Jacksonville, FL National Weather Service, NOAA 13701 Fang Road Jacksonville, FL 32218-7933 E-mail: pmojax@noaa.gov

PMO Charleston, SC NOAA Coastal Services Center 2234 South Hobson Avenue Charleston, SC 29405-2413 E-mail: pmochs@noaa.gov

PMO Norfolk, VA National Weather Service, NOAA 4034-B Geo. Wash. Mem. Hwy. Yorktown, VA 23692-2724 E-mail: pmonor@noaa.gov

PMO New York National Weather Service, NOAA 110 Main Street, Suite 201 South Amboy, NJ 08879-1367 E-mail: pmonyc@noaa.gov PMO Baltimore, MD National Weather Service, NOAA Maritime Center I, Suite 287 2200 Broening Highway Baltimore, MD 21224-6623 E-mail: pmobal@noaa.gov

Great Lakes Ports PMO Great Lakes National Weather Service, NOAA 5027 Miller Trunk Highway Duluth, MN 55811-1442 E-mail: pmoglakes@noaa.gov

GULF OF MEXICO PORTS

PMO New Orleans, LA NOAA Fisheries PO Drawer 1207 Pascagoula, MS 39568-1207 E-mail: pmomsy@noaa.gov

PMO Houston, TX National Weather Service, NOAA Houston Area Weather Office 1620 Gill Road Dickinson, TX 77539-3409 E-mail: pmohou@noaa.gov

Pacific Ports PMO Long Beach, CA National Weather Service, NOAA 501 West Ocean Blvd., Room 4480 Long Beach, CA 90802-4213 E-mail: pmolax@noaa.gov

PMO, Oakland, CA National Weather Service, NOAA 1301 Clay Street, Suite 1190N Oakland, CA 94612-5217 E-mail: pmooak@noaa.gov PMO Seattle, WA National Weather Service, NOAA 7600 Sand Point Way, N.E. BIN C15700 Seattle, WA 98115-6349 E-mail: pmosea@noaa.gov

PMO Kodiak, AK National Weather Service, NOAA 600 Sandy Hook Street, Suite 1 Kodiak, AK 99615-6814 E-mail: pmokdk@noaa.gov

PMO Valdez, AK National Weather Service, NOAA Box 427 Valdez, AK 99686-0427 E-mail: pmovdz@noaa.gov PMO Anchorage, AK National Weather Service Alaska Region 222 West 7th Avenue #23 Anchorage, AK 99513-7575 E-mail: pmoanc@noaa.gov

PMO Honolulu, HI National Weather Service Pacific Region HQ Grosvenor Center, Mauka Tower 737 Bishop Street, Suite 2200 Honolulu, HI 96813-3201 E-mail: pmohon@noaa.gov

EQUIPMENT LOAN

For dedicated vessels, the NWS may supply barometers, barographs, or psychrometers as a loan for use in taking weather observations. The equipment is expensive and hard to replace. A loan agreement form between the PMO and the ship will have to be filled out. If you have such equipment, and are no longer participating in the VOS program, please contact a Port Meteorological Officer. An equipment pick-up, drop-off, or delivery will be scheduled. Equipment supplies are very limited. Please help ensure that equipment is accounted for and available for new VOS program recruits.

WHAT TO MAIL IN

All of your observations (completed on Ships Weather Observations WS Form B-81 or on SEAS archive disks), and, if you have a barograph, your barograms, should be mailed to your PMO when you reach port, using the postage paid envelopes. Make sure the month and year and your vessel's call letters are clearly shown on each page of the B-81 or disk envelope. After reviewing the reports, the PMO sends them to the National Climatic Data Center (NCDC), where they are archived and used in the compilation of climatological and historical records. These records are available to the general public.

Chapter 2 — Ships Synoptic Code and Observing Methods

THE SHIPS SYNOPTIC CODE FM13-X

Code FM-13-X-SHIP, the ships synoptic code, is comprised of 23 groups of symbolic letters representing meteorological and oceanographic elements, report identification and ship location data:

THREE MAIN SECTIONS OF THE SHIPS' SYNOPTIC CODE

The code has three main sections — 0, 1, and 2. Section 0, consisting of the first 5 code groups, contains the identification data (ship report identifier, ship's call sign, date, time, location), and units of wind speed used.

Ships Synoptic Code Section 0

```
BBXX D.....D YYGGi<sub>w</sub> 99L<sub>a</sub>L<sub>a</sub>L<sub>a</sub> Q<sub>c</sub>L<sub>o</sub>L<sub>o</sub>L<sub>o</sub>L
```

Section 0 is a mandatory section. Location, time, and date groups in section 0 must be included in the report. Any errors or missing data here will likely result in the report being discarded.

Section 1 consists of code groups 6-14 and contains most of the meteorological data of the report (precipitation and weather data indicators, cloud base height, visibility, cloud cover, wind direction and speed, air and dew point temperatures, sea level pressure, tendency, and amount of change, present and past weather, and cloud type).

Ships Synoptic Code Section 1

```
i⊳i√hVV Nddff 00fff 1s¬TTT 2s¬T⊿T⊿T⊿
4PPPP 5appp 7wwW<sub>1</sub>W<sub>2</sub> 8N<sub>h</sub>C<sub>L</sub>C<sub>M</sub>C<sub>H</sub>
```

The first two groups of section 1 are also considered mandatory. Ranking of groups does not mean the other groups are less important. All 23 groups of the weather message are important and should normally be included in your report to completely describe conditions at your vessel. If you send a report with just the first seven groups, it will be accepted, but its usefulness to the meteorologist will be limited.

Section 2 consists of code groups 15-23 and contains ships movement data (ships course and speed), oceanographic data (sea surface temperature, sea period and height, primary and secondary swell direction, period, and height), and ice data (for any ice accreting on ship or on the sea surface), and the wet-bulb temperature group.

Ships Synoptic Code Section 2

For all synoptic code sections, always include the maximum number of data groups consistent with observed conditions. Any elements not reported are normally coded with a slash (/). If an entire group of elements is not reported, skip the group completely (do not report a group as ////).

When translating your observations into code, follow all specifications, coding instructions, and code tables very carefully. This will ensure that your coded message contains an accurate description of conditions observed at your vessel.

BBXX, Ship Report Indicator

Definition: The symbolic letters BBXX identify a ship report from a sea station.

How to Code: As BBXX, always included as the first group of the weather message.

Remarks: All ship's weather reports begin with the BBXX indicator. It immediately identifies the report as a ships weather report, distinguishing it from other radio messages.

D.... D, Ship's Radio Call Sign

Definition: Ships call sign consisting of three or more alphanumeric characters.

How to Code: Use your vessel's actual radio call sign.

Remarks: Credit for delivery of your weather report will not be made unless a call sign is provided.

YY, Day of the Month

Definition: Day of the month (UTC) on which the actual observation falls.

Units: Days.

Method of Measurement: Determined according to Universal Time Coordinated (UTC), not by local date or time.

How to Code: Always with two digits. 01 for the first day of the month, 02 for the second day, etc.

Remarks: At 0000 UTC, record the day just beginning, not the day which has just ended. Forgetting to change the day at 0000 UTC is a common observer error.

GG, Actual Time of Observation to the Nearest Whole Hour

Definition: The actual time of observation (UTC) rounded to the nearest whole hour UTC.

Units: Hours.

Method of Measurement: Determined according to Universal Time Coordinated (UTC), not by local date or time.

How to Code: Always coded with two digits rounded to the nearest hour. 0550 UTC as 06, 1440 UTC as 15, 2350 UTC as 00 (not 24), etc. The range of values is 00 - 23

Remarks: The actual time of observation is the time at which the barometer is read. Round off this time to the nearest hour. Take your barometer reading last, after all the other elements have been observed and coded.

Note: Observations should be submitted no more than 29 minutes prior to, or 29 minutes after the synoptic hour.

- 12Z Observation Transmitted at 1129Z: Counted as 11Z observation.
- 12Z Observation Transmitted between 1130Z and 1229Z: Counted as 12Z Observation.
- 12Z Observation Transmitted at 1230Z: Counted as 13Z Observation.

iw, Wind Speed Indicator

Definition: Indicator for source and units of wind speed. Source is how the measurement was made (either estimated or measured).

Units: Knots.

Method of Measurement: Wind speed is either estimated or measured with an anemometer.

How to Code: U.S. VOS Program vessels report wind speed in knots. Use 3 when estimating wind speed in knots, or 4 when measuring wind speed with an anemometer in knots.

Some vessels in foreign VOS programs report wind speed in meters per second. These vessels should use 0 when estimating wind speed in meters per second, or 1 when measuring wind speed with an anemometer in meters per second.

Code figs.	
0	Wind speed estimated in meters per second
1	Wind speed obtained from anemometer in meters per second
3	Wind speed estimated in knots
4	Wind speed obtained from anemometer in knots

Remarks: U.S. VOS program ships are requested to report wind speed in knots. Wind speed estimates are usually based on the state of the sea using the Beaufort scale. When the sea surface cannot be seen, such as on very dark nights, wind speed estimates can be based on how the wind effects shipboard objects, or on the feel of the wind (see ff, Code Section 1).

L_aL_aL_a, Latitude in Tenths of a Degree 99, Data on Position Follow

Definition: Ship's latitude, in degrees and tenths of a degree, measured in terms of degrees north or south of the equator.

Units: Degrees and tenths of a degree.

Method of Measurement: Determine latitude using standard shipboard methods. Tenths is obtained by dividing the number of minutes by 6, and disregarding the remainder. Ignore seconds.

How to Code: Always coded with three digits, the first two digits are actual degrees, the last digit for tenths of a degree. Code 46° 41' as 466 (46° is coded as is, 41' divided by 6 is 6 5/6, 5/6 is disregarded); 33° 04' as 330 (33° is coded as is, 04' divided by 6 is 4/6 which is disregarded and coded as 0 in this case); 23° 00' as 230;

Conversion of Minutes to Tenths of a Degree

Minutes	Degree	
00'-05'	.0	
06'-11'	.1	
12'-17'	.2	
18'-23'	.3	
24'-29'	.4	
30'-35'	.5	
36'-41'	.6	
42'-47'	.7	
48'-54'	.8	
54'-59'	.9	

Remarks: Latitude can vary from 0° (coded 000) to 90° (coded 900). Quadrant of the globe (Q_c) is used to specify whether the latitude is north or south.

Q_c, Quadrant of the Globe

Definition: Quadrant of the globe. Varies according to your position with respect to the equator (0° latitude) and the Greenwich Meridian (0° longitude).

Units:

Method of Measurement: Use standard shipboard methods to determine latitude and longitude. Then determine quadrant as defined below.

How to Code: If you are north of the equator (north latitude), Q_c is coded as 1 when east of the Greenwich Meridian (east longitude), or as 7 when west of the Greenwich meridian; If you are south of the equator (south latitude), Q_c is coded as 3 when east of the Greenwich meridian, or as 5 when west of the Greenwich meridian.

The figure for $\mathbf{Q_c}$ shows whether the latitude is north or south, and the longitude east or west. Select the appropriate figure from this table.

	West Longitude	East Longitude
North Latitude	7	1
South Latitude	5	3

For positions on the equator, and on the Greenwich or 180th meridian, either of the two appropriate figures may be used.

Remarks: Since Q_c is needed to fully describe both latitude and longitude, it is very important to code it correctly. Be very careful to code Q_c properly near quadrant boundaries, especially when your vessel crosses from one quadrant to another.

LoLoLoLo, Longitude

Definition: Longitude in degrees and tenths of a degree. Measured in degrees east or west of the Greenwich Meridian. Values reverse at the international dateline.

Units: Degrees and tenths of a degree.

Method of Measurement: Use standard shipboard methods. Tenths are obtained by dividing the number of minutes by 6, and disregarding the remainder. Ignore seconds.

How to Code: Always coded with four digits, with the leading (hundreds) figure coded as 0 or 1. The first three digits are actual degrees, the last digit for tenths of a degree. Code 142° 55' as 1429 (142° is coded as is, 55' divided by 6 is 9, the remainder is ignored); code 60° 31' as 0605 (60° is coded as 060, 31 divided by 6 is 5, the remainder is ignored); code 9° 40" as 0096 (9° is coded as 009, 40" is coded as 6); code 0° 16' as 0002 (0° is coded as 000, 16" is coded as 2).

Conversion of Minutes to Tenths of a Degree

Minutes	Degree	
00'-05'	.0	
06'-11'	.1	
12'-17'	.2	
18'-23'	.3	
24'-29'	.4	
30'-35'	.5	
36'-41'	.6	
42'-47'	.7	
48'-54'	.8	
54'-59'	.9	

Remarks: Longitude can vary from 0° (coded 0000 on the Greenwich Meridian) to 180° (coded 1800 on the dateline). Quadrant of the globe (Q_c) is used to specify whether the longitude is east or west.

i_R, Precipitation Data Indicator

Definition: Indicator For Inclusion or Omission of Precipitation Data.

Units:

Method of Measurement:

How to Code: Always coded as 4 for U.S. VOS program ships. This indicates that the precipitation group is omitted.

Remarks: Precipitation measurements from moving ships are of questionable value. U.S. VOS program ships do not report precipitation amount.

ix, Weather Data Indicator

Definition: i_x is the indicator for present and past weather data group $7_{ww}W_1W_2$. Tells whether the group is included or omitted from the weather message.

Units:

Method of Measurement:

How to Code: Code as 1 when group $7_{ww}W_1W_2$ is included in the weather message. Code as 3 if group $7_{ww}W_1W_2$ is to be omitted (if present or past weather has not been observed).

When weather group 7wwW₁W₂ is:	Code i_X as:	_
included	1	
omitted (no observation, or data not available)	3	

Remarks: i_x is usually coded as 1, because present and past weather are important information, and are normally included in the weather message. When there is no significant weather to report, you should report the kind of no significant weather there is, such as cloud development not observable (ww = 00), or cloud cover 1/2 or less throughout period ($W_1 = 0$). i_x is coded as 3 only when present and past weather have not been observed at all (in this case group $7_{ww}W_1W_2$ is omitted (skipped over) from the weather message. Incidentally, never transmit a slashed out group as ////; when no data is available for an entire group, it is excluded from the weather message.

h, Cloud Height

Definition: Height above sea surface of the base of the lowest cloud seen.

Units: Feet or meters.

Method of Measurement: Visual estimate. First determine the type of the lowest cloud seen, and then refer to it's normal height range. As a rule of thumb, for a given cloud type, heights are higher in the tropics and during the summer months.

Approximate Cloud Heights

Range	Polar Regions	Temperate Regions	Tropical Regions
High	3,000 to 7,600 meters (10,000 to 25,000 feet)	5,000 to 13,700 meters (16,5000 to 45,000 feet)	6,100 to 18,300 meters (20,000 to 60,000 feet)
Middle	2,000 to 4,000 meters (6,500 to 13,000 feet)	2,000 to 7,000 meters (6,500 to 23,000 feet)	2,000 to 7,600 meters (6,500 to 25,000 feet)
Low	Surface to 2,000 meters (Surface to 6,500 feet)	Surface to 2,000 meters (Surface to 6,500 feet)	Surface to 2,000 meters (Surface to 6,500 feet)

How to Code: Code as 0 - 7 for Cumulus, Stratus, Stratocumulus, Cumulonimbus, or Nimbostratus clouds (these clouds have bases up to 6500 feet).

Code as 8 or 9 for Altostratus, Altocumulus, and Nimbostratus (these clouds have bases above 6500 feet). Code as 9 for Cirrus, Cirrostratus, and Cirrocumulus (these clouds have bases above 8200 feet). Also code as 9 when no clouds are present. Code as / when the sky is obscured by fog or snow, or when reporting at night and cloud base height cannot be determined. Code in accordance with the table on the following page.

Code for Cloud Height, h

Code flgs	. Height in	meters	Height in feet
0	0 to	50	160 or less
1	50 to	100	160 to 330
2	100 to	200	330 to 660
3	200 to	300	660 to 1000
4	300 to	600	1000 to 2000
5	600 to	1000	2000 to 3300
6	1000 to	1500	3300 to 5000
7	1500 to	2000	5000 to 6600
8	2000 to	2500	6600 to 8200
9	2500 or more, or no c	louds	8300 or more, no clouds
/	Height of base of cloud no	t known,	such as when obscured by fog or snow

Use higher code figure for heights at dividing line.

Remarks: Nimbostratus usually has its base under 6500 feet, but may be higher. Discuss your height estimate with the PMO when he comes aboard ship. Weather stations on land use reflected pulses of light to measure cloud base height. You can sometimes check your estimate against a known height, such as when a cloud base intercepts a mountainous coast.

For cumulus and cumulonimbus clouds only, the probable height of the base of these clouds can be determined from the difference between the dry bulb temperature and the dew point temperature (in Celsius degrees). Multiply the difference by 123 to obtain height in meters, or by 405 to obtain height in feet. Example: Dry bulb = 20°C, dew point = 10°C, the height of cumulus is $(20-10)\times 123=1230$ meters. This rule is not valid for other cloud types, and does not apply for ragged or fracto cumulus.

VV, Visibility

Definition: Visibility is the greatest distance an object can be seen and identified.

Units: feet, nautical miles, meters.

Method of Measurement: Usually a visual estimate. Report prevailing visibility — the maximum visibility common to one half or more of the horizon circle. When visibility is uniform in all directions, prevailing visibility and visibility are the same. When visibility is not uniform in all directions, determine prevailing visibility by dividing the horizon circle into sectors of visibility. Estimate the highest visibility common to one half or more of the horizon circle. See the following illustrations. On long ships, when the visibility is low as in dense fog, use objects of known distances onboard. Ships radar can also be used to determine distances to objects or other ships. The horizon is a useful visibility marker. When the horizon appears sharp and clear, your height aboard ship can be used to indicate the distance to the horizon (see the distance to the horizon at sea table on the next page).


How to Code: First determine prevailing visibility. Then code in accordance with the table on the following page.

Remarks: On ships longer than 656 feet (200 meters), code figures 90 and 91 can be determined using the known distances to shipboard objects. On ships longer than 164 feet (50 meters), code figure 90 can be determined using shipboard objects. For the higher code figures, the observer judges visibility based on the appearance of nearby ships, the horizon, or the atmosphere in general.

Code for Visibility, VV

Code flgs.	Visibi in m/l	-	Visibil in yd./nau	•	Code figs.
90	less than	50 m	less than	55 yd.	90
91	50 but less than	200 m	55 but less than	220 yd.	91
92	200 but less than	500 m	220 but less than	550 yd.	92
93	500 but less than	1000 m	550 but less than	½ n. mi.	93
94	1 but less than	2 km	½ but less than	1 n. mi.	94
95	2 but less than	4 km	1 but less than	2 n. mi.	95
96	4 but less than	10 km	2 but less than	5 n. mi.	96
97	10 but less than	20 km	5 but less than	11 n. mi.	97
98	20 but less than	50 km	11 but less than	27 n. mi.	98
99	50 km or more		27 n. mi. or r	nore	99

The visibility ranges corresponding to various weather types are as follows:

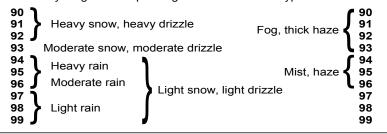

Distance to the Horizon at Sea


leight of eye above the Sea Surface		Horizon	Distance
Meters	Feet	Kilometers	Nautical Miles
5	1.52	4.8	2.6
10	3.05	6.9	3.7
15	4.57	8.3	4.5
20	6.10	9.6	5.2
25	7.62	10.9	5.9
30	9.14	11.9	6.4
35	10.67	12.8	6.9
40	12.19	13.7	7.4
45	13.72	14.5	7.8
50	15.24	15.4	8.3
55	16.76	16.1	8.7
60	18.29	16.4	9.1
65	19.81	17.4	9.4
70	21.34	18.2	9.8
75	22.86	18.7	10.1
80	24.38	19.5	10.5
85	25.91	20.0	10.8
90	27.43	20.6	11.1
95	28.96	21.1	11.4
100	30.48	21.7	11.7
105	32.00	22.2	12.0
110	33.53	22.8	12.3
115	35.05	23.1	12.5
120	36.58	23.7	12.8

Distance to the horizon when viewed from various heights. When out of sight of land and other ships, the horizon is an important visibility marker .


Determining Prevailing Visibility

(Prevailing visibility indicated by asteriks and shading)


Four	Sectors	
Visibility	Approximate	
(miles)	degrees	
5 2 1/2*	90 90 180	
2 1 1/2	90	



Five	Sectors
Visibility	Approximate
(miles)	degrees
5 2 1/2 2 *	50 90 130
	 270
1 1/2	50
1	40



Six	Sectors
Visibility	Approximate
(miles)	degrees
5	60
3	50
2 1/2*	80
	 190
2	90
1 1/2	70
1	10



Prevailing visibility is the maximum visibility common to one half (180°) or more of the horizon circle.

N, Total Cloud Cover

Definition: The total fraction of the sky covered by clouds of all types.

Units: Eighths of the sky.

Method of Measurement: Visually estimate how many eighths of the sky are covered by cloud, regardless of type. It is sometimes easier to estimate how much of the sky without clouds can be seen, i.e. if two eighths of the sky is clear, then 6 eighths is covered by cloud.

How to Code: See table below.

Code for Total Cloud Cover, N

Code flgs.	Fraction of sky covered
0	Cloudless
1	1 eighth or less, but not zero
2	2 eighths
3	3 eighths
4	4 eighths
5	5 eighths
6	6 eighths
7	7 eighths or more but not totally covered
8	8 eighths, sky completely covered by clouds
9	Sky obscured by fog, snow, or other meteorological phenomena
/	Cloud cover indescernible for reasons other than Code fig. 9, or observation is not made

Remarks: A mackeral sky (Altocumulus, stratocumulus, or cirrocumulus covering the whole sky) should be coded as N=7, since breaks are always present in these cloud forms. When observing clouds through fog, base your estimate for N on the amount of clouds that can be seen through the fog. When a completely clear sky is observed through fog or haze, report N as 0.

dd, Wind Direction

Definition: True direction, in tens of degrees, from which wind is blowing. This is a mean direction averaged over a period of ten minutes.

Units: Degrees, referred to true north $(0^{\circ}T)$.

Method of Measurement: Determine true wind direction from either (1) the orientation of sea (wind) waves, or streaks of foam on the sea surface, or (2) the apparent wind direction observed aboard ship.

Method (1) is easiest, because it provides true wind direction independent of the ships movement. Sight along the lines of the sea wave crests. Since true wind direction is the same as the direction from which the sea waves are coming, dd is perpendicular (90°) to the advancing waves crests. Also, use lines of foam on the sea surface (which may appear for Force 7 or greater wind speeds). Wind blown foam streaks are parallel to the direction of the true wind.

Method (2) determines true wind direction from the apparent wind (the wind experienced on board when the ship is underway). Apparent wind results from two motions — the actual motion of the air (true wind), and the motion of the ship. Apparent wind direction is best determined by facing directly into the wind on the windward side of the ship. Other good apparent wind indicators are funnel smoke, the orientation of shipboard flags or pennants, or a wind vane. Once apparent wind direction is obtained, you must remove the motion of the ship to obtain true wind. See ff for methods of determining true wind from apparent wind.

How to Code: Coded on a scale from 00 to 36 (and 99 for variable), expressed in tens of degrees. Code true north as 36, east as 09, south as 18, west as 27. See the table on the following page.


Code for Wind Direction, dd

Code figure		Code figure	
00	Calm		
01	5°-14°	21	205°-214°
02	15°-24°	22	215°-224°
03	25°-34°	23	225°-234°
04	35°-44°	24	235°-244°
05	45°-54°	25	245°-254°
06	55°-64°	26	255°-264°
07	65°-74°	27	265°-274°
08	75°-84°	28	275°-284°
09	85°-94°	29	285°-294°
10	95°-104°	30	295°-304°
11	105°-114°	31	305°-314°
12	115°-124°	32	315°-324°
13	125°-134°	33	325°-334°
14	135°-144°	34	335°-344°
15	145°-154°	35	345°-354°
16	155°-164°	36	355°- 4°
17	165°-174°	99	Variable, or all
18	175°-184°		directions.
19	185°-194°		
20	195°-204°		

Remarks: Report the mean wind direction over the ten minute period immediately preceding observation time. If this time period includes an abrupt change in wind direction, only average data obtained after the change. If using apparent or relative wind direction, remember to determine true wind before reporting.

Shipboard True Wind Plotting Board


- Set ship's true course under pointer (120°).
- Mark a small dot down from the center at a distance equal to the ship's speed (12 knots). Label this dot "T."




- line up with the vertical grid lines.

 6. Read the true wind direction from which
 the wind is blowing under the pointer
 (261°T).
- The true wind speed is the distance between T and W (22 knots).

5. Rotate the upper dial until T and W $\,$



- Rotate pointer dial to the relative wind (T)* (230°).
- Mark a small dot down from the center at a distance equal to the apparent wind speed (15 knots). Label it "W."
- * Relative wind (T) is the apparent wind direction relative to the true ship's course.



NOTE: Apparent wind direction must be related to a true direction. This is done by adding the apparent wind direction relative to the ship's bow to the ship's true course (for apparent wind direction use 0° for wind coming directly from the bow , increasing clockwise to 359° 1° off the port bow). If the sum is greater than 360, subtract 360 from it.

ff, Wind Speed

Definition: True wind speed, measured or estimated as indicated by i_w, of 98 knots or less.

Units: Knots (U.S. VOS program ships).

Method of Measurement: Use either (1) the appearance of the sea surface (the sea state) and the Beaufort scale, (2) an anemometer, or (3) the effects of the wind on people or objects aboard ship. Method (1) relies on the action of the wind to create sea waves, and results in a true wind estimate, so there is no need to factor out the motion of the ship. Refer to the sea state photographs and descriptions as a guide. These assume steady state conditions which implies the wind direction and speed have been relatively steady over many hours.

If using method (2), make sure your anemometer is properly calibrated, and located so the ships superstructure will not interfere with air motion. An anemometer provides an apparent wind measurement. Apparent wind is the wind you experience aboard a moving ship, and is a combination of the actual air motion across the water (true wind you report as ff), and the ship's motion. The only time there is no apparent wind aboard ship is when the vessel is moving in the same direction and with the same speed as the true wind. To remove the ship's motion and determine true wind, you must use either a true wind plotting board, or the graphical method, both illustrated on the following pages.

Method (3) also provides an apparent wind, so like method (2), requires removal of the ship's motion to determine true wind. Use method (3) when the sea surface cannot be seen (such as on very dark nights), and when an anemometer is not available. Refer to the table for apparent wind speed indicators.

How to Code: Code in actual knots. See the table on the next page. For wind of 99 knots or greater, code as 99 and report wind speed using group 00fff.

Remarks: When estimating wind speed using the state of the sea and Beaufort scale,

continues on page 2-24

Code for Wind Speed, ff

Code Figs. (Knots)	Mean Speed	Beau- fort	Description	Sea criterion when sea fully developed		bable es in	m (ft)	aximum
00	00	0	Calm	Sea like a mirror	-			-
01 - 03	02	1	Light Air	Ripples with the appearance of scales are formed, but without foam crests	0.1	(1/4)	0.1	(1/4)
04 - 06	05	2	Light breeze	Small wavelets, still short but more pronounced, crests have a glassy appearance and do not break	0.2	(½)	0.3	(1)
07 - 10	09	3	Gentle breeze	Large wavelets, crests begin to break; foam of glassy appearance; perhaps scattered white horses	0.6	(2)	1	(3)
11 - 16	13	4	Modt. breeze	Small waves, becoming longer; fairly frequent white horses	1	(3½)	1.5	(5)
17 - 21	19	5	Fresh breeze	Moderate waves, taking a more pronounced long form; many white horses are formed (chance of some spray)	2	(6)	2.5	(8½)
22 - 27	24	6	Strong breeze	Large waves begin to form; white foam crests are more extensive everywhere (probably some spray)	3	(9½)	4	(12)
28 - 33	30	7	Near gale	Sea heaps up and white foam from breaking waves begins to be blown in streaks along the direction of the wind	4	(13½)	5.5	(19)
34 - 40	37	8	Gale	Moderately high waves of greater length; edges of crests begin to break into the spindrift; the foam is blown in wellmarked streaks along the direction of the wind	5.5	(18)	7.5	(25)
41 - 47	44	9	Strong gale	High waves; dense streaks of foam along the direction of the wind; crests of waves begin to topple, tumble and roll over; spray may affect visibility	7	(23)	10	(32)
48 - 55	52	10	Storm	Very high waves with long overhanging crests; the resulting foam, in great patches, is blown in dense white streaks along the direction of the wind; on the whole, the surface of the sea takes a white appearance; tumbling of the sea becomes heavy and shock-like; visibility affected	9	(29)	12.5	(41)
56 - 63	60	11	Violent Storm	Exceptionally high waves (small and medium-sized ships might be for a time lost to view behind the waves); the sea is completely covered with long white patches of foam lying along the direction of the wind; everywhere the edges of the wave crests are blown into froth; visibility affected	11.5	(37)	16	(52)
64 and over	_	12	Hurricane	The air is filled with foam and spray; sea completely white with driving spray; visibility very seriously affected	14	(45)	-	

Note: For wind of 99 knots or greater, use 99 for ff, and report wind speed in group 00fff; e.g. for a wind from 100° true at 125 knots, dd = 10, ff = 99, and fff = 125.

Effect of Apparent Wind on Ships

Apparent Speed (Knots)	Indication
Less than 1	Calm, smoke rises vertically.
1 - 3	Smoke drifts from funnel.
4 - 6	Wind felt on face. Smoke rises at about 80°.
7 - 10	Wind extends light flag and pennants. Smoke rises at about 70°.
11 - 16	Wind raises dust and loose paper on deck. Smoke rises at about 50°. No noticeable sound in the rigging. Slack halyards curve and sway. Heavy flag flaps limply.
17 - 21	Wind felt strongly on face. Smoke rises at 30°. Slack halyards whip while bending continuously to leeward. Taut halyards maintain slightly bent position. Low whistle in the rigging. Heavy flag doesn't fully extend but flaps over entire length.
22 - 27	Wind stings face in temperature below 2°C. Slight effort in maintaining balance against the wind. Smoke rises at 15°. Both slack and taut halyards whip slightly in bent position. Low moaning, rather than whistle, in the rigging. Heavy flag extends and flaps more vigorously.
28 - 33	Necessary to lean slightly into the wind to maintain balance. Smoke rises at 5° to 10°. Higher pitched moaning and whistling heard from rigging. Halyards still whip slightly. Heavy flag extends fully and flaps only at the end. Oilskins and loose clothing inflate and pull against the body.
34 - 40	Head pushed back by the force of the wind if allowed to relax. Oilskins and loose clothing inflate and pull strongly. Halyards rigidly bent. Loud whistle from rigging. Heavy flag straight out and whipping.


continued from 2-22

remember that heavy rain and floating ice have a dampening effect on the sea surface, so under these conditions, wind speed may be greater than the sea state indicates. There will always be a lag period between the wind speed increasing or decreasing and the sea wave height rising or falling, especially

during a sudden change in wind speed. Wind blowing against a tide or strong current causes a greater than normal sea wave height, while wind blowing with the tide or current causes a smaller than normal sea wave height. When any of these conditions exist, an adjustment may be needed to your wind speed

of these conditions exist, an adjustment may be needed to your wind speed estimate.

Graphic Method for Determining the True Wind

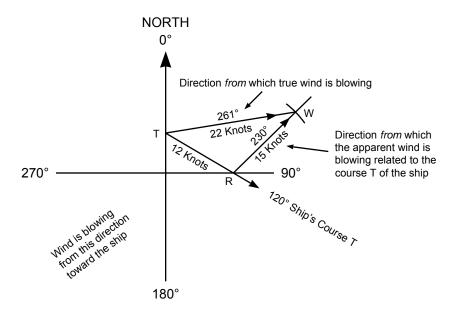

Ship's Course 120° (True) Ship's speed 12 knots

Apparent wind direction

relative to the bow 110° R


Apparent wind direction

relative to ship's course $120^{\circ} + 110^{\circ} = 230^{\circ}$

Apparent wind speed 15 knots

- 1. Select a center position. Place a dot and label it "T".
- With a vertical line through point T designated as the 0° line, draw a line for the ship's course at 120°.
- Select a scale and draw an arc across the course line at 12 scale units (12 knots)
 representing the ship's speed as shown in Figure 2.3. Mark the intersection with
 a dot and label it "R". The ship's course and speed are represented by the vector
 TR.
- 4. From point R, draw a line for the apparent wind direction (from 230°) and, using the same scale, the apparent wind speed (15 knots); label this point "W". The vector RW is the relative wind.
- Complete the triangle by drawing the line TW for the true wind as shown in the figure above. The direction is from the same direction as the label reads, TW for True Wind, from the "T". True wind is from 261° (true), 22 knots, which is coded N2622.

BEAUFORT SCALE

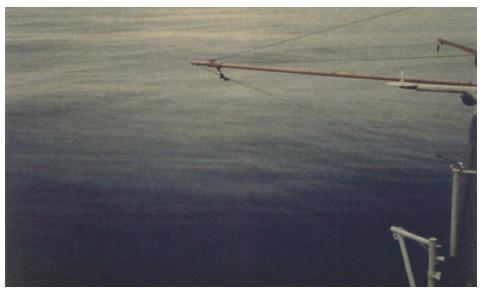

Beaufort Number	Descriptive Term	Knots	Specification
0	Calm	0	Sea like a mirror.



Beaufort Number	Descriptive Term	Knots	Specification
1	Light Air	1-3	Ripples with the appearance of scales are formed, without foam



Beaufort Number	Descriptive Term	Knots	Specification
2	Light breeze	4-6	Small wavelets, still short, but more pronounced; crests have a glassy appearance but do not break.



Beaufort Number	Descriptive Term	Knots	Specification
3	Gentle	7-10	Large wavelets; crests begin to break; foam of glassy appearance: perhaps scattered white horses (white caps).



Beaufort Number	Descriptive Term	Knots	Specification
4	Moderate	11-16	Small waves, becoming longer; fairly frequent white horses.



Beaufort Number	Descriptive Term	Knots	Specification
5	Fresh	17-21	Moderate waves, taking a more pronounced long form; many white horses are formed (chance of some spray).



Beaufort Number	Descriptive Term	Knots	Specification
6	Strong	22-27	Large waves begin to form; the white foam crests are more extensive everywhere (probably some spray).



Beaufort Number	Descriptive Term	Knots	Specification
7	Near gale	28-33	Sea heaps up and white foam from breaking waves begins to be blown in streaks along the direction of the wind.



Beaufort Number	Descriptive Term	Knots	Specification
8	Gale	34-40	Moderately high waves of greater length; edges of crests begin to break into the spindrift; the foam is blown in well-marked streaks along the direction of the wind.



Beaufort Number	Descriptive Term	Knots	Specification
9	Strong gale	41-47	High waves; dense streaks of foam along the direction of the wind; crests of waves begin to topple, tumble, and roll over; spray may affect visibility.



Number	Term	Knots
10	Storm	48-55

Specification

Very high waves with long overhanging crests; the resulting foam, in great patches, is blown in dense white streaks along the direction of the wind; on the whole, the sea surface takes a white appearance; the tumbling of the sea becomes heavy and shock-like; visibility affected.



Number	Term	Knots	Specification
11	Violent	56-63	Exceptionally high waves (small and medium-sized ships might be lost to view for a time behind the waves); the sea is completely covered with long white patches of foam lying along the direction of the wind; everywhere the edges of the wave crests are blown into froth: visibility affected



Beaufort Number	Descriptive Term	Knots	Specification
12	Hurricane	64 and over	The air is filled with foam and spray; sea completely white with driving spray; visibility very seriously affected.

In enclosed waters, or when near land, with an off-shore wind, wave heights will be smaller and the waves steeper.

fff, High Speed Wind 00, High Speed Wind Group Indicator

```
SECTION 0 — IDENTIFICATION DATA
               BBXX D...D
                                         YYGGi<sub>w</sub>
                                                       99L_aL_aL_a Q_cL_oL_oL_oL_o
SECTION 1 — METEOROLOGICAL DATA
                    i<sub>R</sub>i<sub>x</sub>hVV
                                 Nddff
                                            00fff
                                                       1s_nTTT 2s_nT_dT_dT_d
                      4PPPP
                                  5appp
                                            7wwW<sub>1</sub>W<sub>2</sub> 8N<sub>h</sub>C<sub>I</sub>C<sub>M</sub>C<sub>H</sub>
SECTION 2 — OCEANOGRAPHIC DATA
    222D_{s}v_{s} 0s_{s}T_{w}T_{w}T_{w} 2P_{w}P_{w}H_{w}H_{w} 3d_{w1}d_{w1}d_{w2}d_{w2} 4P_{w1}P_{w1}H_{w1}H_{w1}
            5P_{w2}P_{w2}H_{w2}H_{w2} 6I_sE_sE_sR_s 8s_wT_hT_hT_h ICE
                                                                           c_iS_ib_iD_iz_i
```

Definition: High Wind Speed, measured or estimated as indicated by i_w , of 99 knots or more.

Units: Knots (For U.S. VOS program ships).

Method of Measurement: Use the Beaufort scale, or determine apparent wind either with an anemometer or by noting effects of the wind on shipboard objects. Same as for ff, page 2-21.

How to Code: In actual knots. 99 knots is coded as 099, 110 knots is coded as 110. Whenever fff is used to report a very high speed wind, ff in group Nddff is coded as 99.

Remarks: For wind of 98 knots or less, ff is used to report wind speed and group 00fff is omitted from the weather message.

s_n, Sign of Air Temperature

1, Air Temperature Data Indicator

Definition: s_n is the arithmetic sign of the air temperature.

Units: Celsius degrees.

Method of Measurement: Thermometer or psychrometer.

How to Code:

Code for Sign of Air Temperature, s_n

Code flgs.	
0	Temperature is positive or zero
1	Temperature is negative

Remarks: See remarks under TTT.

TTT, Air Temperature (Dry-bulb)

Definition: Air temperature, in whole degrees and tenths of a degree Celsius, its sign being given by S_n . It is a measure of the heat content of the air.

Units: Celsius degrees.

Method of Measurement: Thermometer or psychrometer. When reading the thermometer, the eye must be at the same level as the end of the mercury column. Take the reading from the windward side of the ship in a stream of air fresh from the sea, which has not been in contact with, or passed over the ship. The thermometer should be shielded from radiation, precipitation, and spray.

How to Code: In actual Celsius degrees (to tenths of a degree).

Examples: 12.1°C:
$$TTT=121$$
 and $S_n=0$
4.2°C: $TTT=042$ and $S_n=0$
0.8°C: $TTT=008$ and $S_n=0$
-0.8°C: $TTT=008$ and $S_n=1$
-6.2°C: $TTT=062$ and $S_n=1$

Remarks: If a fixed location louvered screen psychrometer is used, one must be installed on each side of the ship, so the observation can always be made from the windward side. If using a sling psychrometer stored inside, allow sufficient time for the thermometer to adjust to the outside temperature.

s_n, Sign of Dew Point Temperature

2, Dew Point Temperature Indicator

Definition: s_n is the sign of the dew point temperature.

Units: Celsius degrees.

Method of Measurement: Psychrometer.

How to Code:

Code for Sign of Dew Point Temperature, s_n

Code figs.	
0	Temperature is positive or zero
1	Temperature is negative

Remarks: See remarks under TTT.

T_dT_dT_d, Dew Point Temperature

Definition: Dew Point Temperature, in degrees and tenths of a degree Celsius, its sign being given by s_n . This is the temperature at which condensation will occur, causing dew or frost to form. It corresponds to a relative humidity of 100%.

Units: Celsius degrees.

Method of Measurement: Computed from the wet and dry bulb temperatures. Using the psychrometer, determine the dry and wet bulb temperatures. There are several ways of computing dewpoint based on these values. The AMVER/SEAS and TurboWin software will automatically compute dewpoint by entering dry and wet bulb values. If you do not use either of these applications to encode your ships weather observations, a table for computing dewpoint is available from any PMO.

How to Code: In actual degrees Celsius, to the nearest tenth.

Examples:
$$9.6^{\circ}\text{C}$$
: $\mathbf{T_dT_dT_d=096}$ and $\mathbf{s_n=0}$
- 9.2°C : $\mathbf{T_dT_dT_d=092}$ and $\mathbf{s_n=1}$
- 15.4°C : $\mathbf{T_dT_dT_d=154}$ and $\mathbf{s_n=1}$

Remarks: The wet bulb thermometer must be read as soon as possible after ventilation or whirling has stopped.

To operate the sling psychrometer: Moisten the wet bulb muslin sleeve thoroughly, on all sides, with distilled water, or the purest water available (ordinary water contains dissolved substances which deposit on the wicking as it evaporates, causing the wet bulb to read high). Change the wicking weekly, or more often if it becomes dirty or contaminated by salt spray.

From the windward side of the ship, whirl the psychrometer at a rate of about 4 revolutions per second for about 1 minute. Read the thermometers immediately, then whirl for another 10 seconds, and read again. If the readings are unchanged, record these as your official temperatures. If the readings are different at the second reading, continue the whirling and reading until two successive sets of readings are the same.

For temperatures below 0°C, the dew point calculation table assumes the muslin wicking is covered with a thin coating of ice. After moistening the muslin with ice cold water, you should initiate the freezing of the water by touching the muslin with a piece of ice, snow, or other cold object. This may need to be done up to a half hour before observation time, to allow enough time for the ice coating to form. Do not allow the coating of ice on the wet bulb to become too thick—this will result in an incorrect reading. If ice is building up, immerse the wet bulb in a small container of warm water to reduce the ice.

PPPP, Sea Level Pressure

4, Sea Level Pressure Data Indicator

Definition: PPPP is the atmospheric pressure at mean sea level, in tenths of a hectopascal (millibar), omitting the thousands digit. It represents the weight or force exerted by the air above a given point.

Units: Hectopascals ((hp) which are numerically the same as millibars).

Method of Measurement: Usually measured with a precision aneroid barometer, although a mercury barometer can also be used. Gently tap the face of the aneroid barometer just before measurement. To obtain an accurate reading, your eye should be level with the barometer face. The mercury in the tube of the mercury barometer will oscillate up and down. Average the high and low points of the oscillation before recording.

How to Code: Report the reading in actual hectopascals, omitting the decimal point. When the sea level pressure is 1000 hp or greater, the leading 1 is omitted.

Examples: 992.4 hp: **PPPP = 9924**1000.0 hp: **PPPP = 0000**1002.8 hp: **PPPP = 0028**

1032.1 hp: **PPPP = 0321**

Remarks: Great precision is required for the pressure measurement, and a PMO should calibrate your barometer once every three months. The PMO will attach a correction tab with a correction to sea level to be made before reporting. The barometer should be installed in a position where it is least likely to be affected by vibration, concussion, or movement of the ship (generally as close to the center of flotation as possible. The barograph should be installed with the pen arm installed athwart ship (parallel to beam), to minimize the risk of its swinging off the chart.

Correcting Station Pressure to Sea Level Pressure (hp)

Height of Barometer Outside Air Temperature (°C)							
m	ft.	-20	-10	0	10	20	30
1.5	5	0.2	0.2	0.2	0.2	0.2	0.2
3.0	10	0.4	0.4	0.4	0.4	0.4	0.3
4.6	15	0.6	0.6	0.6	0.6	0.5	0.5
6.1	20	0.8	8.0	8.0	0.7	0.7	0.7
7.8	25	1.0	1.0	1.0	0.9	0.9	0.9
9.1	30	1.2	1.2	1.2	1.1	1.1	1.0
10.7	35	1.5	1.4	1.4	1.3	1.3	1.2
12.2	40	1.7	1.6	1.5	1.5	1.4	1.4
13.7	45	1.9	1.8	1.7	1.7	1.6	1.6
15.2	50	2.1	2.0	1.9	1.9	1.8	1.7
16.8	55	2.3	2.2	2.1	2.0	2.0	1.9
18.3	60	2.5	2.4	2.3	2.2	2.2	2.1
19.8	65	2.7	2.6	2.5	2.4	2.3	2.3
21.3	70	2.9	2.8	2.7	2.6	2.5	2.4
22.9	75	3.1	2.9	2.8	2.7	2.6	2.5
24.4	80	3.3	3.2	3.1	3.0	2.9	2.8
25.9	85	3.5	3.4	3.3	3.2	3.1	3.0
27.4	90	3.8	3.6	3.5	3.4	3.2	3.1
29.0	95	4.0	3.8	3.7	3.5	3.4	3.3
30.5	100	4.2	4.0	3.9	3.7	3.6	3.5
32.0	105	4.4	4.2	4.1	3.9	3.8	3.7
33.5	110	4.6	4.4	4.2	4.1	4.0	3.8
35.1	115	4.8	4.6	4.4	4.3	4.1	4.0
36.6	120	5.0	4.8	4.6	4.5	4.3	4.2
38.2	125	5.2	5.0	4.8	4.7	4.5	4.3

Station pressure is the actual pressure at the level of the barometer.

This table should only be used if your barometer has not been adjusted to read sea level pressure, or if a PMO has not attached a correction sticker. This is normally the case for vessels of British Commonwealth countries only.

Barometers aboard NWS VOS program ships are adjusted to read sea level pressure. Any correction to be applied will be indicated on the correction sticker and this table should be ignored.

For Great Lakes vessels: Barometers are adjusted to read sea level pressure using the elevation of Lake Erie in the correction factor. From other Great Lakes, to obtain sea level pressure you must know the difference in elevation between Lake Erie and the lake you are on, and add or subtract a correction.

From Lake Huron or Lake Michigan (both 10 feet above Lake Erie), please add .4 hp (see table above) to your pressure reading before reporting. For Lake Superior (30 feet above Lake Erie), add 1.1 hp. For Lake Ontario (325 feet below Lake Erie), subtract 12 hp.

a, Three Hour Characteristic of Pressure Tendency

5, Three Hour Pressure Tendency Data Indicator

Definition: (a) is the characteristic of pressure tendency during the three hours preceding the time of observation. It describes how pressure has varied, e.g. increasing then decreasing, decreasing then increasing, decreasing then steady, etc.

Units: Hectopascals.

Method of Measurement: The barograph provides the best indication of the pressure tendency characteristic. Study the barograph trace in the three hour period preceding the time of observation. The shape of the trace determines which code figure to use.

How to Code: Code according to the table on the next page.


Remarks: The actual pressure change during the three hours preceding the time of observation is recorded by ppp.

- 1. Remember that:
 - (a) If the pressure is higher than three hours ago, there are four choices for a; 0, 1, 2, and 3.
 - (b) If the pressure is lower than three hours ago, there are also four choices for a; 5, 6, 7, and 8.
 - (c) If the pressure is exactly the same as it was three hours ago, there are three choices for a; 0, 4, and 5.
- 2. If the trace contains minor irregularities but in general resembles one of the pictures in the code Table, disregard the minor irregularities and code the general characteristics of the trace.

Examples: = 8 = 3


3. When the trace can apparently be represented by two characteristics, code the

characteristics which describes the last part of the trace provided this agrees with the three-hour pressure change.




4. When the trace may apparently be represented by two characteristics and the characteristics of the last part of the trace does not agree with the 3-hour pressure change, choose the characteristics which is most descriptive of the whole 3-hour trace and which also agrees with the net 3-hour pressure change.

Examples:

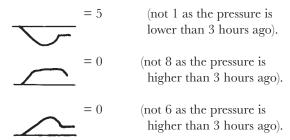

5. When the trace is not steady but the 3-hour pressure change is zero, use code figure 0 or 5 as appropriate for the last part of the trace (code figure 4 is only used when the trace is absolutely steady).



Determining Barometric Tendency Characteristic, a

DESCRIPTION OF	CHARACTERISTIC		NOMI			REPRES		ON		Code
PRIMARY UNQUALIFIED	ADDITIONAL REQUIREMENTS		В	(Fa	r Coding	Purpos	es) F	G	н	Figure
REQUIREMENT	Increasing, then decreasing.	^		€	<u>~</u>	~~~	\triangle		M	0
HIGHER	increasing, then steady; orincreasing, then increasing more glowly.	_		5						1
Atmospheric pressure now higher than 3 hours ago.	Steadily Increasing Unsteadily	/	<u> </u>	~	سمي					2
	Decreasing or steady, then in- creasing, or increasing, then increasing more rapidly.	/	<u> </u>	<u> </u>	√_ √_	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	√ _	<u>~~</u>		3
THE SAME	Increasing, then decreasing.	\wedge	\triangle	Δ					\mathcal{L}_{Δ}	0
Atmospheric pres- sure now same as 3 hours ago.	Steady	_								4
	Decreasing, then increasing.	\bigvee	∇	V	$ \nabla$					5
	Decreasing, then increasing.	\vee	\leq	7	5	abla	Ww.		₹	5
LOWER	Decreasing, then steady; or decreasing, then decreasing more slowly.				8 1	₹w			m	6
Atmospheric pressure now lower than 3 hours ago.	Steadily Decreasing Unsteadily	\	7	- -		- Ty				7
	Steady or increas- ing, then decreas- ing; or decreasing, then decreasing more rapidly.	1		77	~ ~	~~ <u>`</u>	√ -	~~ _	√ ^∕	8

ppp, Amount of Pressure Tendency

Definition: Amount of pressure tendency during the three hours preceding the time of observation, expressed in tenths of a hectopascal (millibar). This is the net pressure change during the three hour period.

Units: Hectopascals.

Method of Measurement: Either use the barograph trace, or read your barometer at the beginning and end of the three hour interval. Determine the difference in pressure and code according to the instructions below.

How to Code: In actual hectopascals.

Examples:
$$0.0 \text{ hp}, \mathbf{ppp} = \mathbf{000}$$

 $0.4 \text{ hp}, \mathbf{ppp} = \mathbf{004}$

4.7 hp, **ppp = 047** 10.2 hp, **ppp = 102**

Remarks: If the pressure at time of observation is 1015.3 hp, and the pressure three hours earlier was 1012.9 hp, the net pressure change (amount of pressure tendency) was 2.4 hp. Code ppp as 024.

ww, Present Weather

7, Present and Past Weather Data Group Indicator

Definition: www is the present weather and refers to atmospheric phenomena occurring at the time of observation, or which has occurred during the hour preceding the time of observation.

Units:

Method of Measurement: Visually or audibly determined. Phenomena to report include precipitation, obstructions to visibility, thunder, squalls, haze, dust, smoke, and cloud development.

How to Code: Report the most severe weather condition that you observe, reading down the list from 99 (most severe) to 00 (least severe). Code in accordance with the table on the following pages. The higher coded values have priority over the lower coded values. Exception: code figure 17 has precedence over code figures 20 to 49.

Remarks: There are one hundred different types of present weather to report. At sea however, phenomena such as duststorms, sandstorms, drifting or blowing snow, and dust whirls are rarely observed. Hence, about eighty-five different types of present weather are applicable to marine shipboard observations.

Codes for Present Weather, ww

The weather code is arranged in priority order . Reading down the list, select the first applicable (most severe) weather condition that you observe and enter the code number for **ww**.

59-99 PRECIPITATION AT SHIP AT TIME OF OBSERVATION

95-99 THUNDERSTORM AT TIME OF OBSERVATION

- 99 Heavy thunderstorm with hail*
- **98** Thunderstorm with duststorm or sandstorm
- 97 Heavy thunderstorm with rain and/or snow, but no hail*
- 96 Slight or moderate thunderstorm with hail*
- 95 Slight or moderate thunderstorm with rain and/or snow, but no hail*

94-91 THUNDERSTORM DURING THE PAST HOUR BUT NOT AT THE TIME OF OBSERVATION

Note: Use code **29** if there is no precip. at time of observation.

94 Moderate or heavy snow, or rain and snow mixed, or hail*

Thunderstorm in past hour

- 93 Slight snow, or rain and snow mixed, or hail*
- **92** Moderate or heavy rain
- 91 Slight rain

85-90 SOLID PRECIPITATION IN SHOWERS

Siig	nt	Moderate or heavy
89 87 85	Shower of hail*, no thunder Shower of snow pellets or ice pellets† Shower of snow	90 88 86
•	th or without rain, or rain and snow mixed udes hail, ice pellets or snow pellets	

80-84 RAIN SHOWERS

- 84 Shower of rain and snow mixed, moderate or heavy
- 83 Shower of rain and snow mixed, slight
- **82** Violent rain shower
- **81** Moderate or heavy rain shower
- 80 Slight rain shower

^{*} Includes hail, ice pellets or snow pellets

^{*} Includes hail, ice pellets or snow pellets

70-79 SOLID PRECIPITATION NOT FALLING AS SHOWERS

79 78 77 76	Isolated star-like snow crystals (with or without fog) Snow grains (with or without fog) Diamond dust (with or without fog)	
Inte	rmittent	Continuous
74 72 70	Heavy snow in flakes Moderate snow in flakes Slight snow in flakes	75 73 71
	60-69 RAIN (NOT FALLING AS SHOW	ERS)
Slig	ht	Moderate or heavy
68 66	Rain or drizzle with snow Freezing rain	69 67
Inte	rmittent	Continuous
64 62 60	Heavy rain Moderate rain Slight rain	65 63 61
	50-59 DRIZZLE	
Slig	ht	Moderate or heavy
58 56	Drizzle and rain mixed Freezing drizzle	59 57
Inte	rmittent	Continuous
54 52 50	Heavy drizzle Moderate drizzle Slight drizzle	55 53 51

00-49 NO PRECIPITATION AT SHIP AT TIME OF OBSERVATION

40-49 FOG AT THE TIME OF OBSERVATION

(Visibility in fog is less than ½ naut. mi.) Sky visible Sky invisible 48 Fog, depositing rime 49 46 Fog, has begun or thickened in past hour 47 44 Fog, no change in past hour 45 42 Fog, has become thinner in past hour 43 41 Fog in patches* 40 Fog at a distance but not at ship in past hour*

30-39 (Not likely to be used in ship reports)

Slig	ht or moderate	Heavy
38 36 32 31 30	Blowing snow, high (above eye level) Drifting snow, low (below eye level Duststorm or sandstorm, increasing Duststorm or sandstorm, unchanging Duststorm or sandstorm, decreasing	39 37 35 34 33

20-29 PHENOMENA IN PAST HOUR BUT NOT AT TIME OF OBS.

29 Thunderstorm, with or without precipitation	29	Thunderstorm,	with o	or without	precipitatio
--	----	---------------	--------	------------	--------------

28 Fog (in past hour but not at time of obs.)

*Visibility may be greater than ½ naut. mi.

- 27 Shower(s) of hail*, or of hail* and rain mixed
- **26** Shower(s) of snow, or of rain and snow mixed
- 25 Shower(s) of rain
- **24** Freezing drizzle or freezing rain
- 23 Rain and snow mixed, or ice pellets
- **22** Snow
- **21** Rain (not freezing)
- 20 Drizzle (not freezing) or snow grains

18-19 SQUALLS, FUNNEL CLOUDS

- **19** Funnel cloud(s) seen in past hour or at time of observation
- **18** Squalls (no. precip.) in past hour or at time of observation
- 17 Thunder at time of observation, no precipitation at ship*

^{*}Includes hail, ice pellets or snow pellets.

^{*}Code figure 17 has precedence over code figures 20-49.

13-16 PHENOMENA WITHIN SIGHT BUT NOT AT SHIP

- **16** Precip. within 3 naut. mi. reaching surface
- **15** Precip. beyond 3 naut. mi. reaching surface
- **14** Precipitation in sight, not reaching surface
- 13 Lightning visible, no thunder heard

10-12 MIST AND SHALLOW FOG

- **12** Shallow fog more or less continuous
- **11** Shallow fog in patches
- **10** Mist (Visibility ½ Nautical mi. or more)

04-09 HAZE, DUST, SAND OR SMOKE

- 09 Duststorm or sandstorm within sight
- **08** Dust whirls in past hour (NOT FOR MARINE USE)
- **07** Blowing spray at the ship
- **06** Widespread dust suspended in the air
- **05** Dry haze
- **04** Visibility reduced by smoke

00-03 CHANGE OF SKY DURING PAST HOUR

Code figs.

- **03** Clouds generally forming or developing
- **02** State of the sky on the whole unchanged
- **01** Clouds dissolving or becoming less developed
- **00** Cloud development not observable

Definitions for Present Weather

Scheduled Time of Observation is the time at which the observation should be completed and ready for transmission. These times are the four main synoptic hours of 0000, 0600, 1200, and 1800 UTC, or the intermediate synoptic hours of 0300, 0900, 1500, and 2100 UTC.

At the Time of Observation means at the scheduled time of observation, or in the case of code figures 20 through 29, during the 60 minutes prior to the scheduled time. If it is necessary to make an observation an hour earlier than the scheduled time (say at 1 100 instead of 1200), then "at the time of observation" means 1 100.

NOTE: For the purpose of reporting a thunderstorm, "at the time of observation" includes the 15 minutes prior to the scheduled time of observation.

During the Past Hour means during the period starting 60 minutes before the scheduled time of observation.

NOTE: For purposes of reporting a thunderstorm, code figure 29, the "past hour" is from 1 hour and 15 minutes ago to 15 minutes ago.

Within Sight or At A Distance means that although precipitation, etc., is not occurring at the ship, it can be seen from the ship or platform.

Precipitation

Rain. Precipitation of liquid water particles, either in the form of drops larger than 0.5 mm (0.02 inch) or smaller drops which, in contrast to drizzle, are widely separated.

Freezing Rain. Rain which freezes upon impact with the ground or a ship.

Drizzle. Fairly uniform precipitation composed exclusively of fine drops (diameter less than 0.5 mm or 0.02 inch) very close together. Drizzle appears to float while following air currents, although unlike fog droplets, it falls to the ground. Drizzle drops are too small to appreciably disturb still water puddles.

Freezing Drizzle. Drizzle which freezes upon impact with the ground or a ship.

Snow. Precipitation of ice crystals, mostly branched in the form of six-pointed stars. At temperatures higher than about - 5°C (23°F), the crystals are generally clustered to form snowflakes.

Snow Pellets. Precipitation of white, opaque grains of ice. The grains are round or sometimes conical. Diameters range from about 2 to 5 mm (0.08 to 0.2 inch). Snow pellets are brittle and easily crushed; when they fall on hard surfaces, they bounce and often break up.

Snow Grains. Precipitation of very small, white, opaque grains of ice similar in structure to snow crystals. When the grains hit a hard surface, they do not bounce or shatter. They usually fall in small quantities, mostly from stratus, and never as showers.

Ice Pellets. Precipitation of transparent or translucent pellets of ice, which are round or irregular, rarely conical, and which have a diameter of 5 mm (0.2 inch), or less. The pellets usually rebound when striking hard surfaces and make a sound on impact. There are two main types:

- a. Hard grains of ice consisting of frozen raindrops, or largely melted and refrozen snowflakes (formerly sleet). This type falls as continuous or intermittent precipitation.
- b. Pellets of snow encased in a thin layer of ice which has formed from the freezing, either of droplets intercepted by the pellets, or of water resulting from the partial melting of the pellets. This type falls as showers.

Hail. Precipitation of small balls or other pieces of ice (hail stones) falling separately or frozen together in irregular lumps. Hailstones consist of alternate opaque and clear layers of ice in most cases. Hail is normally associated with thunderstorms and surface temperatures above freezing.

Ice Prisms (Ice Crystals). A fall of unbranched snow crystals in the form of needles, columns, or plates. They are often so tiny that they seem to be suspended in the air. They may fall from a cloud or from clear air. The crystals are visible mainly when they glitter in the sunshine or other bright light (diamond dust); they may then produce a luminous pillar or other optical phenomena. This hydrometeor (rarely more than the lightest precipitation), which is frequent in polar regions, occurs only at very low temperatures in stable air masses.

Character of Precipitation.

Continuous. Intensity changes gradually, if at all.

Intermittent. Intensity changes gradually, if at all, but precipitation stops and starts at least once within the hour preceding the observation.

Shower. Precipitation changes intensity or starts and stops abruptly Showers fall from cumuliform clouds.

Estimating the Intensity of Rain

Light. Scattered drops that do not completely wet an exposed surface, regardless of duration, to a condition where individual drops are easily seen; slight spray is observed over the decks; puddles form slowly; sound on roofs ranges from slow pattering to gentle swishing; steady small streams may flow in scuppers and deck drains.

Moderate. Individual drops are not clearly identifiable; spray is observable just above deck and other hard surfaces; puddles form rapidly; sound on roofs ranges from swishing to gentle roar.

Heavy. Rain seemingly falls in sheets; individual drops are not identifiable; heavy spray to height of several inches is observed over hard surfaces; visibility is greatly reduced; sound on roofs resembles roll of drums or distant roar.

Intensity of Drizzle or Snow with Visibility

Light. Visibility 1 Km (1/2 n. mile) or more.

Moderate. Visibility less than 1 Km (1/2 n. mile) but not less than 1/2 Km (1/4 n. mile).

Heavy. Visibility less than 1/2 Km (1/4 n. mile).

Estimating the Intensity of Hail and Ice Pellets

Light. Few stones or pellets falling with little, if any, accumulation.

Moderate. Slow accumulation.

Heavy. Rapid accumulation.

Drifting Snow and Blowing Snow. Snow particles raised from the ground by a strong, turbulent wind. Observed when ship is in or near ice, not over open sea.

- a. *Drifting Snow*. Snow particles raised by the wind to small heights above the ground. Visibility is not reduced below 12 Km (6.5 n. miles) at eye level, although obstructions below this level may be veiled or hidden by the particles moving nearly horizontal to the ground.
- b. **Blowing Snow.** Snow particles raised and stirred violently by the wind to moderate or great heights. Visibility is poor, 12 Km (6.5 n. miles) or less, and the sky may become obscured when the particles are raised to great heights.

Thunderstorms

Thunderstorm (Code 99-95). A local storm produced by a cumulonimbus cloud. It is always accompanied by lightning and thunder, usually with strong gusts of wind, heavy rain, and sometimes with hail.

Lightning. A flash of light from a sudden electrical discharge which takes place from or inside a cloud, from high structures on the ground, or from mountains.

Intensity of Thunderstorm. The intensity of a thunderstorm is based on the following characteristics observed within the previous 15 minutes:

- a. Thunderstorm, wind gusts less than 50 knots, and hail, if any , less than 20 mm (3/4 inch) in diameter.
- b. Severe thunderstorm, wind gusts of 50 knots or greater, or hail 20 mm (3/4 inch) or greater in diameter.

Beginning of Thunderstorm. A thunderstorm is considered to begin at a station when:

- a. Thunder is heard, or
- b. Overhead lightning or hail is observed, but the local noise level might prevent hearing thunder.

Ending of Thunderstorm. A thunderstorm is considered to have ended 15 minutes after the last occurrence of thunder.

Fog and Shallow Fog. A visible aggregate of minute water particles (droplets) which are based at the earth's surface. The difference between a cloud and fog is that a cloud has a base above the surface.

- a. Fog (code 40-49) reduces horizontal visibility (to less than 1/2 n. mile) and verticle visibility, and may extend over a sizable area. Fog is reported when the depth of the phenomena is greater than approximately 10 meters (33 feet) at sea.
- b. Shallow fog has little vertical extent, normally less than 10 meters (33 feet), and reduces visibility horizontally, but to a lesser extent vertically. The stars may often be seen by night and the sun by day. This is a local phenomena usually formed by radiational cooling of the air. It is often patchy, forming first over cooler surface water areas.
- c. When fog is present and the occurrence does not clearly fit the definition of shallow fog, the phenomenon will be reported as fog. If visibility is greater than 1/2 n. mile, it is mist, code 10.

Ice Fog. A suspension of numerous minute ice crystals in the air , based at the earth's surface, which reduces horizontal visibility. Unlike fog, ice fog does not produce rime or glaze on cold exposed objects. Temperatures are usually at or below approximately -30° C (-22° F) when ice fog forms. However, a mixture of liquid and ice fog occasionally forms at temperatures below freezing. This condition may persist for a few hours as the fog changes to ice fog and dissipates due to a drying of the aireven though temperatures continue to fall. Optical ef fects similar to those associated with ice prisms are observed in ice fog (diamond dust, etc.).

Temperature-dew point differences may approach 4°C (8°F) or more.

Spray and Blowing Spray.

- a. Spray. Water droplets torn by the wind from the crests of waves and carried up a short distance into the air.
- b. Blowing Spray. Spray raised in such quantities as to reduce the visibility at eye level (6 feet on shore, 10 meters (33 feet) at sea) to 12 Km (6.5 n. miles) or less.

Dew. A deposit of water drops on objects at or near the surface produced by condensation of water vapor from the surrounding clear air.

White Dew. A deposit of white, frozen dew drops. White dew forms as liquid dew , then freezes.

Hoar Frost. A deposit of ice having a crystalline appearance, generally assuming the form of scales, needles, or fans. It is formed when water vapor is deposited on surfaces whose temperatures are at or below freezing, as compared to white dew, which is formed before freezing occurs.

Rime. A deposit of ice, produced by fog at temperatures below freezing. It is composed of grains separated by air, sometimes adorned with crystalline branches.

Glaze (Clear Ice). A coating of ice, generally clear and smooth, but with some air pockets. It is formed on exposed objects at temperatures below or slightly above the freezing temperature by the freezing of super-cooled drizzle, rain drops, or spray Glaze is denser, harder, and more transparent than either rime or hoar frost.

Tornado. A violent, rotating column of air , forming a pendant, usually from a cumulonimbus cloud over land and touching the ground. It nearly always starts as a funnel cloud and is accompanied by a loud roaring noise.

Funnel Cloud. A violent, rotating column of air which does not touch the ground, usually a pendant from a cumulonimbus cloud.

Waterspout. If a funnel cloud forms over the water and touches the water surface, it is called a waterspout.

Lithometeors. A lithometeor is a meteor consisting of a visible concentration of mostly solid, dry particles. The particles are more or less suspended in the air or lifted from the ground by wind. The more common lithometeors are defined below.

Haze. A suspension in the air of extremely small, dry particles invisible to the naked eye and sufficiently numerous to give the air an opalescent appearance. This phenomenon resembles a uniform veil that subdues all colors. Dark objects viewed through this veil tend to have a bluish tinge while bright objects, such as the sun or distant lights, tend to have a dirty vellow or reddish hue.

When haze is present and the sun is well above the horizon, its light may have a peculiar silvery tinge. Haze particles may be composed of a variety of substances; e.g., dust, salt, residue from distant fires or volcanoes, pollen, etc., which generally are well dif fused through the atmosphere.

Dust. Fine particles suspended in the air by a duststorm or sandstorm that may have occurred at some distance from the ship. Dust gives a tan or gray tinge to distant objects. The sun's disk is pale and colorless, or has a yellow tinge.

Smoke. A suspension in the air of small particles produced by combustion. This phenomenon may be present either near the earth' s surface or in the free atmosphere. When viewed through smoke, the disk of the sun at sunrise and sunset appears very red. The disk may have an orange tinge when the sun is above the horizon. Evenly distributed smoke from distant sources generally has a light grayish or bluish appearance. A transition to haze may occur when smoke particles have traveled great distances; for example, 25 to 100 miles or more, and when the larger particles have settled and the remaining particles have become widely scattered through the atmosphere.

Blowing Dust. Dust raised by the wind to moderate heights above the ground and restricting horizontal visibility to less than 12 Km (6.5 n. miles).

- a. **Duststorm.** Same as blowing dust, except visibility is reduced to less than 1 Km (1/2 nautical mile) but not less than 1/2 Km (1/4 n. mile).
- b. **Severe Duststorm.** Same as blowing dust, except visibility is reduced to less than 1/2 Km (1/4 n. mile).

Blowing Sand. Sand raised by the wind to moderate heights above the ground, reducing horizontal visibility to less than 12 Km (6.5 n. miles).

- a. *Sandstorm.* Same as blowing sand, except horizontal visibility is reduced to less than 1 Km (1/2 n. mile) but not less than 1/2 Km (1/4 n. mile).
- b. **Severe Sandstorm.** Same as blowing sand, except horizontal visibility is reduced to less than 1/2 Km (1/4 n. mile).

W₁W₂, Past Weather

Definition: The types of weather since the previous main synoptic hour (0000, 0600, 1200, 1800 UTC), usually different from that being reported by ww. Thus, for an observation made at 1200 UTC, the past weather period began six hours ago at 0600 UTC. For an observation made at an intermediate time, say 2100 UTC, the past weather period began three hours ago at 1800 UTC.

Units:

Method of Measurement: Visually or audibly determined.

How to Code: If two or more different types of reportable weather have occurred, use W_1 for the highest code figure, and W_2 for the second highest code figure. If the past weather has been continuous and unchanging since the last main synoptic hour, W_1 and W_2 are coded the same. W_1 is always greater than or equal to W_2 .

Code for Past Weather, W₁W₂

Code Figure	es
9	Thunderstorm(s) with or without precipitation
8	Shower(s)
7	Snow, or rain and snow mixed
6	Rain
5	Drizzle
4	Fog, ice fog, or thick haze (visibility was less than ½ nautical mile)
3	Sandstorm, duststorm, or blowing snow
2	Cloud cover more than ½ throughout period
1	Cloud cover more than ½ for part of period, and ½ or less for
	another part of period
0	Cloud cover ½ or less throughout period

Remarks: Some examples:

- (1) It has been raining during the entire period since the last main synoptic hour. Code W_1W_2 as 66.
- (2) During the past six hours thunder was heard (code figure 9), and up until about one hour ago there were showers (code figure 8). Code W_1W_2 as 98.
- (3) It has been cloudy since the previous main synoptic hour (code figure 2). It rained for about an hour (code figure 6). There was some fog (code figure 4) and there were some showers (code figure 8). $CodeW_1W_2$ as 86.

N_h, Amount of C_L or C_M Cloud Present 8, Cloud Data Indicator

Definition: N_h is the amount of all the C_L cloud present or, if no C_L cloud is present, the amount of all the C_M cloud present.

Units: Fraction of the sky in eighths.

Method of Measurement: Visual observation.

How to Code:

Code for Amount of C_L or C_M Cloud Present, N_h

Code Figures	
0	No C _L or C _M clouds present
1	1 eighth or less, but not zero
2	2 eighths
3	3 eighths
4	4 eighths
5	5 eighths
6	6 eighths
7	7 eighths or more but not totally covered
8	8 eighths; sky totally covered
9	Sky obscured by fog, snow, or other meteorological phenomena
1	Cloud cover indiscernible for reasons other than code figure 9, or observation not made

Remarks: If the cloud can be seen through the fog, estimate cloud amount as well as circumstances permit. If the sun, moon, or stars can be seen through the fog and there is no evidence of cloud above the fog, use code figure 0 for N_h .

C_L, Low Cloud Type

Definition: Clouds of type Stratocumulus, Stratus, Cumulus and Cumulonimbus.

Stratocumulus (Sc) – Gray or whitish patch, sheet, or layer of cloud which almost always has dark parts, composed of tesselations, rounded masses, rolls, etc., which are nonfibrous, and which may or may not be merged; most of the regularly arranged small elements have an apparent width of more than 5 degrees.

Stratus (St) – Generally grey cloud layer with a fairly uniform base, which may give drizzle, ice prisms, or snow grains. When the sun is visible through the cloud, its outline is clearly discernible. Stratus generally does not produce halo phenomena.

Cumulus (Cu) – Detached clouds, generally dense and with sharp outlines, developing vertically in the form of rising mounds, domes, or towers, of which the bulging upper part often resembles a cauliflower. The sunlit parts are mostly brilliant white; their base is relatively dark and nearly horizontal.

Cumulonimbus (Cb) – Heavy, dense cloud, with considerable vertical extent, in the form of a mountain, or huge towers. At least part of its upper portion is usually smooth, fibrous, or striated, and nearly always flattened; this part often spreads out in the shape of an anvil or vast plume.

Units:

Method of Measurement: Visual observation. Use the NWS cloud poster, cloud brochure, or other suitable cloud atlas which relate cloud photographs to cloud definitions, descriptions, and specifications. It is best to keep a close, continuous watch on the development of clouds.

How to Code:

Code for Low Cloud Type, C_L

Code Figures	
9	Cb with a clearly fibrous top, often anvil-shaped; with or without other Cb , or Cu , Sc , St or ragged Cu or St of bad weather.
3	Cb the tops of which, at least partially, lack sharp outlines, but are clearly not fibrous or anvil-shaped; Cu , Sc or St may also be present.
4	Sc formed by the spreading out of Cu; Cu may also be present.
8	Cu and Sc not formed by the spreading out of Cu ; the bases of the Cu and Sc at different levels.
2	Cu of moderate or strong vertical extent, generally with protuberances in the form of domes or towers, with or without other Cu or Sc , all having their bases at same level.
Codes 1, 5, 6	3 and 7 are of equal priority. Choose the cloud type that is predominant.
1	Cu with little vertical extent and seemingly flattened, and/or ragged Cu other than of bad weather.
5	Sc not formed by the spreading out of Cu.
6	St in a more or less continuous layer, and/or in ragged shreds; but no ragged St of bad weather.
7	Ragged St and/or ragged Cu , both of bad weather, usually below As or Ns .
0	No Sc, St, Cu or Cb clouds present.
1	Sc , St , Cu and Cb invisible owing to darkness, fog, blowing dust or sand, or other similar phenomena.

Remarks: If more than one type of C_L is present, the order of priority for reporting (from highest to lowest priority) is $C_L = 9, 3, 4, 8, 2$. These are followed in priority by $C_L = 1, 5, 6, 7$, all of equal priority (if two or more of this second category are present, report the type which covers the greatest part of the sky).



C_L = **1**Cumulus with little vertical extent.



C_L = **2**Cumulus with moderate or greater vertical extent.

C_L = 3

Cumulonimbus, tops not fibrous, outline not completely sharp, no anvil.



C_L = **4**Stratocumulus from the spreading cumulus.



C_L = **5**Stratocumulus not formed from spreading cumulus.



C_L = **6**Stratus in a sheet or layer.



 $C_L = 7$

Stratus fractus and/or cumulus fractus of bad weather.



 $C_L = 8$

Cumulus and stratocumulus (not spreading cumulus), bases at different levels.



 $C_L = 9$

Cumulonimbus with fibrous top, often with an anvil.

C_M, Middle Cloud Type

Definition: Clouds of type Altocumulus, Altostratus and Nimbostratus.

Altocumulus (Ac) – White or gray patch, sheet, or layer of cloud, generally with shading, composed of laminae, rounded masses, rolls, etc, which are sometimes partly fibrous or diffuse, and which may or may not be merged; most of the regularly arranged small elements usually have an apparent width between one and five degrees.

Altostratus (As) – Grayish or bluish sheet or layer of striated, fibrous, or uniform appearance, totally or partly covering the sky, and having parts thin enough to reveal the sun at least vaguely, as through ground glass. Does not show halo phenomena.

Nimbostratus (Ns) –Heavy cloud layer, often dark, the appearance of which is rendered diffuse by falling rain or snow, which in most cases reaches the ground. It is thick enough to blot out the sun or moon.

Units:

Method of Measurement: Visual observation.

How to Code: Code in accordance with the table on the following page.

Remarks: If more than one code figure for C_M is applicable at the same time, the priority order is $C_M = 9.8.7.6.5.4.3.2.1.7.$

Code for Middle Cloud Type, $\mathbf{C}_{\mathbf{M}}$

	odde for middle oldda Type, om
Code Figures	3
9	Ac of a chaotic sky, generally at several levels.
8	Ac with sproutings like small towers or battlements, or Ac having the appearance cumulus-shaped tufts.
7	Either: (a) Ac in two or more layers, opaque in places, not increasing. (b) Opaque layer of Ac , not increasing. (c) Ac together with As or Ns .
6	Ac resulting from the spreading out of Cu (or Cb).
5	Ac , semi-transparent; in bands or Ac in one or more layers, progressively invading the sky; these Ac clouds generally thicken as a whole.
4	Patches (often almond or fish-shaped) of Ac , mostly semi-transparent; clouds occur at one or more levels and continually change in appearance.
3	Ac , mostly semi-transparent; cloud elements change only slowly and are all at a single level
2	Either As , most of which is sufficiently dense to hide the sun or moon; or Nimbostratus .
1	Ac , mostly semi-transparent, through which the sun or moon may be weakly visible, as through ground glass.
0	No Ac, As or Ns clouds present
1	$\boldsymbol{Ac},\boldsymbol{As},$ and \boldsymbol{Ns} invisible owing to darkness, or because of an over cast layer of $\boldsymbol{C_L}$ cloud.



C_M = 1Altostratus, semitransparent, sun or

moon dimly visible.




C_M = 2Altostratus, dense enough to hide sun

or moon, or nimbostratus.



 $C_{M} = 3$

Altocumulus, semitransparent, cloud elements change slowly, one level.

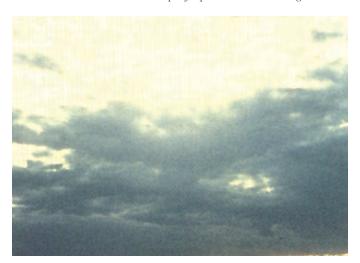

 $C_{M} = 4$

Altocumulus patches semi-transparent, multilevel, cloud elements changing. Also altocumulus lenticular.



 $C_{M} = 5$

Altocumulus, one or more bands or layers, expanding, thickening.



 $C_{M} = 6$

Altocumulus from the spreading of cumulus or cumulonimbus.



 $C_{M} = 7$

Altocumulus, one or more layers, mainly opaque, not expanding, or altocumulus with altostratus or nimbostratus.



 $C_{M} = 8$

Altocumulus with tower like sproutings.



 $C_{M} = 9$

Altocumulus of a chaotic sky, usually with heavy broken cloud sheets at different levels.

C_H, High Cloud Type

Definition: Clouds of type Cirrus, Cirrocumulus, Cirrostratus.

Cirrus (Ci) — Detached clouds in the form of delicate white filaments or white or mostly white patches or narrow bands. These clouds have a fibrous appearance (hairlike), or a silky sheen, or both.

Cirrocumulus (Cc) –Thin white patch, sheet, or layer of cloud without shading, composed of very small elements in the form of grains, ripples, etc., merged or separate, and more or less regularly arranged; most of the elements have an apparent width of less than one degree.

Cirrostratus (Cs) – Transparent, whitish cloud veil of fibrous (hairlike) or smooth appearance, totally or partly covering the sky, and generally producing halo phenomena.

Units:

Method of Measurement: Visual observation.

How to Code: Code in accordance with the table on the following page.

Remarks: If more than one code figure for C_H is applicable at the same time, the priority order is $C_H = 9.7.8, 6.5, 4.3, 1.2.$

Code for High Cloud Type, $\mathbf{C}_{\mathbf{H}}$

9 Cc alone, or Cc with Cl and/or Cs, but the Cc is predominant. 7 Veil of Cs covering the whole sky. 8 Cs not increasing and not covering the whole sky. 6 Cl (often in converging bands) and Cs, or Cs alone; in either cas	
7 Veil of Cs covering the whole sky.8 Cs not increasing and not covering the whole sky.	
8 Cs not increasing and not covering the whole sky.	
6 CI (often in converging bands) and Cs, or Cs alone; in either case	
spreading over the sky and generally thickening, the continuous veil extends more than 45° above the horizon, but does not cover the whole sky.)
5 Same as code 6 above, except that the continuous veil does not reach 45° above the horizon.	
CI in the form of hooks and/or filaments, progressively invading the sky; they generally become thicker as a whole.)
3 Dense Ci, often anvil-shaped, being the remains of the upper part of a Cb.	3
1 CI in the form of filaments, strands or hooks, not progressively invading the sky.	
 Either: (a) Dense CI in patches or tangled sheaves, not increasing which sometimes seem to be the remains of the upper part of a Ci (b) Ci with sproutings like small turrets or battlements, or Ci having the appearance of cumulus-shaped tufts.) .
No Ci, Cc or Cs clouds present.	
/ CI, Cc and Cs invisible owing to darkness, or because of a continuous layer of lower clouds.	



C_H = **1**Cirrus filaments, strands, hooks, not expanding.



C_H = **2**Dense cirrus in patches or sheaves, not increasing, or cirrus like cumuliform tufts.



C_H = **3**Dense cirrus, often the anvil remaining from cumulonimbus.



C_H = **4**Cirrus hooks or filaments, increasing, becoming denser.



C_H = **5**Cirrus bands and/or cirrostratus, increasing, growing denser, veil below 45°.



C_H = **6**Cirrus bands and/or cirrostratus, increasing, growing denser, veil abive 45°.




C_H = **7**Cirrostratus covering whole sky.



C_H = **8**Cirrostratus, not increasing, not covering whole sky.



C_H = **9**Cirrocumulus alone, and/or cirrus and cirrostratus.

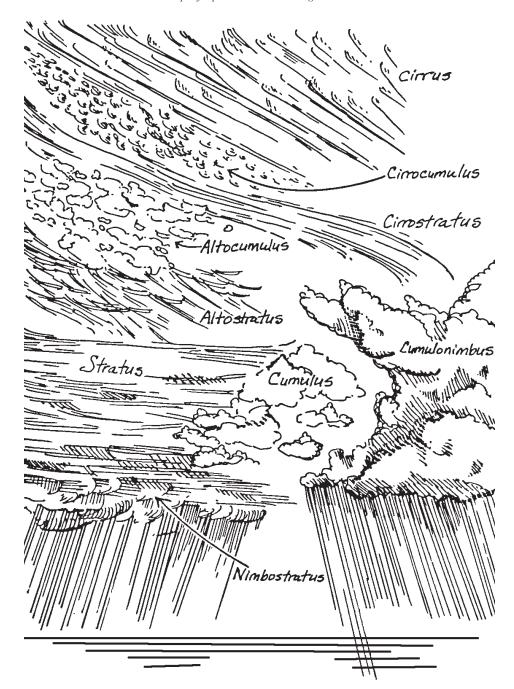

Cloud types.

D_s, Ship's True Course 222, Section 2 Indicator

Definition: D_s is the true ship's course made good during the three hours preceding the time of observation.

Units: Compass directions.

Method of Measurement: If the ships course has been constant during the three hours preceding the time of observation, then D_s is the actual course at the time of observation. However, if the ship has altered course in the previous three hours, D_s will probably differ from the course at the time of observation. See the diagram on the next page.


How to Code:

Code for Ship's True Course, Ds

Code Figures	True Direction
0	Ship hove to
1	NE
2	E
3	SE
4	S
5	SW
6	W
7	NW
8	N
9	Unknown
1	Not reported

Remarks: From the code table, select the true direction that is closest to ships course made good.

Determination of ship's course made good.

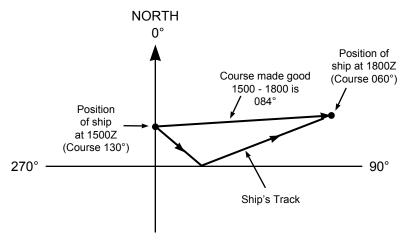

In this example, the ship has altered course during the past three hours, so course made good (084°) differs from the actual course at the time of observation (060°). 084° is approximately eastward, so D_s is coded as 2.

v_s, Ship's Average Speed

Definition: Ship's average speed made good during the three hours preceding the time of observation.

Units: Knots.

Method of Measurement: Find the distance in nautical miles, between the ships position at the time of observation and its position three hours previously. Obtain V_s by dividing this distance by three. v_s is the same as the ships speed at observation time only if the ships course and speed have not changed during the three hour period.

How to Code:

Code for Ship's Average Speed, vs

Code Figures	True Direction
0	0 knot
1	1 to 5 knots
2	6 to 10 knots
3	11 to 15 knots
4	16 to 20 knots
5	21 to 25 knots
6	26 to 30 knots
7	31 to 35 knots
8	36 to 40 knots
9	Over 40 knots
/	Not reported

Remarks: If your vessel has changed course during the three hour period, remember to determine the *distance made good* of the ship during the three hour period, and divide this by three. In this case, distance made good is less than the actual distance the ship has travelled.

s_s, Sign and Type of Sea Surface Temperature Measurement

0, Sea Surface Data Indicator

Definition: s_s is the sign of the sea surface temperature (SST), and also indicates how the SST was measured.

Units: Celsius degrees.

Method of Measurement: Engine room intake thermometer, hull mounted contact sensor thermometer, bucket thermometer.

How to Code:

Code for Sign and Type of Sea Surface Temperature, ss

Code Figures	
0	positive or zero intake measurement
1	negative intake measurement
2	positive or zero bucket measurement
3	negative bucket measurement
4	positive or zero hull contact sensor
5	negative hull contact sensor
6	positive or zero neither intake, bucket or hull
7	negative neither intake, bucket or hull

Remarks: Select the appropriate code figure according to the sign of the sea surface temperature and method of measurement.

T_WT_WT_W, Sea Surface Temperature

Definition: Sea surface water temperature, in tenths of a degree Celsius, its sign being given by s_s . The temperature to be observed is that of the sea surface representative of conditions in the near-surface mixing layer underlying the ocean skin.

Units: Celsius degrees.

Method of Measurement: Engine room intake thermometer, hull mounted contact sensor thermometer, bucket thermometer.

How to Code: In actual degrees Celsius as shown below.

Examples:
$$8.4^{\circ}\text{C}$$
: $\mathbf{T_wT_wT_w} = \mathbf{084} \ \mathbf{s_s} = \mathbf{0}$ (intake thermometer) 0.4°C : $\mathbf{T_wT_wT_w} = \mathbf{004} \ \mathbf{s_s} = \mathbf{0}$ (intake thermometer) -0.7°C : $\mathbf{T_wT_wT_w} = \mathbf{007} \ \mathbf{s_s} = \mathbf{1}$ (intake thermometer) -1.5°C : $\mathbf{T_wT_wT_w} = \mathbf{015} \ \mathbf{s_s} = \mathbf{1}$ (intake thermometer)

Remarks: It is important to have your sea water thermometer checked and calibrated regularly. The engine room intake thermometer should be checked every time your vessel goes into the yard for service, and replaced whenever necessary.

P_WP_W, Period of Wind Waves 2, Wind Wave Data Indicator

Definition: $P_w P_w$ is the period of wind waves in seconds. Wave period is the time between the passage of two successive wave crests (or successive troughs) past a fixed point.


Units: Seconds.

Method of Measurement: Count seconds, preferably with a watch or stopwatch. Note a small object (such as a piece of wood thrown overboard), a piece of seaweed, patch of foam, or a bird floating on the water. Start counting when the object reaches the crest of the first well formed wave. As the crest passes, the object will pass into the trough, then to the next crest, etc. Divide the total elapsed time by the number of crests passing under the object to obtain the period.

How to Code: Coded directly in seconds. Thus, if the sea wave period is 8 seconds, P_wP_w is coded as 08.

Remarks: For measuring mean period of a wave system, only consider the higher waves in the center of each group of well formed waves. Any flat, or badly formed waves are omitted from the record.

Characteristics of a Simple Wave

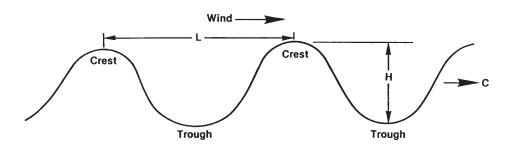

H_WH_W, Height of Wind Waves

Definition: The vertical distance between trough and crest for wind waves in units of 0.5 meter.

Units: Half meters.

Method of Measurement: Visual estimate. It is best for the observer to locate on the side of the ship from which the waves are coming. On very dark nights or in dense fog, estimate the wave height based on the last clear sighting, and whether wind speed or ships motion have changed.

How to Code: The code is in units of half meters e.g. code figure 08 is 8 half meters = 4 meters = 13 feet:

	-			w	
Code figs. (½ m)	Height in ft.	Code figs. (½ m)	Height in ft.	Code figs. (½ m)	Height in ft.
00	Less than 1	10	16 or 17	20	32 to 33
01	1 or 2	11	18	21	34 or 35
02	3 or 4	12	19 or 20	22	36
03	5	13	21 or 22	23	37 or 38
04	6 or 7	14	23	24	39 or 40
05	8 or 9	15	24 or 25	25	41
06	10	16	26 or 27	26	42 or 43
07	11 or 12	17	28	27	44 or 45
08	13	18	29 or 30	//	Not
09	14 or 15	19	31		determined

Code for Height of Waves, HWHW

To obtain the code figures for heights over 45 feet, multiply the height in feet by 0.6 and round off the result to the nearest whole number.

Remarks: As with wave period, consider only the larger well-formed waves near the center of the wave group. Estimate the average height of these larger waves, and disregard the lesser waves. There is a tendency to underestimate wave height if you are fifty feet or more above the sea surface. Your visual estimate may be more accurate from a lower deck.

d_{W1}**d**_{W1}, **Direction of Primary Swell Waves**3, Direction of Swell Waves Data Indicator

Definition: True direction, in tens of degrees, from which primary swell waves are coming. Use swell wave height to distinguish primary from secondary swell — the primary or predominant swell system is the one having the higher swell waves. Swell are waves that have travelled into your area of observation after being generated by wind in other areas.

Units: Degrees.

Method of Measurement: Visual estimate. Sight along the swell wave crests of the primary swell. The direction the swell waves are coming from will be 90° to the crestline.




How to Code: Use the same code table as for dd, wind direction

Code for Direction of Primary Swell, $d_{W1}d_{W1}$

Code figur	Code figure		ure
01	5°-14°	21	205°-214°
02	15°-24°	22	215°-224°
03	25°-34°	23	225°-234°
04	35°-44°	24	235°-244°
05	45°-54°	25	245°-254°
06	55°-64°	26	255°-264°
07	65°-74°	27	265°-274°
08	75°-84°	28	275°-284°
09	85°-94°	29	285°-294°
10	95°-104°	30	295°-304°
11	105°-114°	31	305°-314°
12	115°-124°	32	315°-324°
13	125°-134°	33	325°-334°
14	135°-144°	34	335°-344°
15	145°-154°	35	345°-354°
16	155°-164°	36	355°- 4°
17	165°-174°	99	Variable, or all
18	175°-184°		directions.
19	185°-194°		
20	195°-204°		

Remarks: If there is no swell, or if the swell cannot be distinguished, omit the swell groups $(3d_{W1}d_{W1}d_{W2}d_{W2}, 4P_{W1}P_{W1}H_{W1}H_{W1}, 5P_{W2}P_{W2}H_{W2}H_{W2})$ from the weather message.

Diagram showing development of wind waves in a storm area and evolution of wind waves into swell as the waves travel out of the wave-generating area.

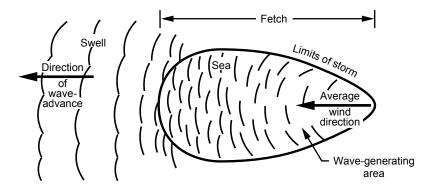

To distinguish wind waves from swell, remember that wind waves are generated by the wind blowing at the time of observation, or in the recent past, in your local area. Swell waves have travelled into your area of observation, after having been generated by winds in other areas (sometimes thousands of miles away). As wind waves move out from under the wind that produces them and become swell, their character changes. The crests become lower and more rounded, and they move in trains of similar period and height. Swell is more symmetrical and uniform than sea, and will have a longer period.

d_{W2}d_{W2}, Direction of Secondary Swell Waves

```
SECTION 0 — IDENTIFICATION DATA
                    D . . . . D
                                  YYGGi<sub>w</sub>
             BBXX
                                                99L_aL_aL_a Q_cL_oL_oL_oL_o
SECTION 1 — METEOROLOGICAL DATA
                 i_R i_x hVV
                            Nddff 00fff
                                               1s_nTTT 2s_nT_dT_dT_d
                   4PPPP
                                        7wwW_1W_2 8N_hC_LC_MC_H
                             5appp
SECTION 2 — OCEANOGRAPHIC DATA
   222D_{s}V_{s} 0s_{s}T_{w}T_{w}T_{w} 2P_{w}P_{w}H_{w}H_{w} 3d_{w1}d_{w1}d_{w2}d_{w2} 4P_{w1}P_{w1}H_{w1}H_{w1}
          5P_{w2}P_{w2}H_{w2}H_{w2} 6I_sE_sE_sR_s
                                            8s_wT_bT_bT_b ICE c_iS_ib_iD_iz_i
```

Definition: True direction, in tens of degrees, from which secondary swell waves are coming. The secondary swell system has lower waves than the primary swell and usually comes from a different direction.

Units: Degrees.

Method of Measurement: Visual estimate. Sight along the secondary swell wave crests. The wave direction will be 90° to the crestline.

How to Code: Use the same code table as for dd, wind direction

Code for Direction of Secondary Swell, dw2dw2

Code figure	Code figure		ure
01 02 03 04 05 06 07 08 09	5°-14° 15°-24° 25°-34° 35°-44° 45°-54° 55°-64° 65°-74° 75°-84° 85°-94°	21 22 23 24 25 26 27 28 29 30	205°-214° 215°-224° 225°-234° 235°-244° 245°-254° 255°-264° 265°-274° 275°-284° 285°-294° 295°-304°
11 12 13 14 15 16 17 18 19	105°-114° 115°-124° 125°-134° 135°-144° 145°-154° 155°-164° 165°-174° 175°-184° 185°-194°	31 32 33 34 35 36 99	305°-314° 315°-324° 325°-334° 335°-344° 345°-354° 355°- 4° Variable, or all directions.

Remarks: If only one swell system is observed, use slants (//) for the secondary swell.

Pw1Pw1, Primary Swell Wave Period

4, Data Indicator for Period and Height of Primary Swell Waves

Definition: Period of primary swell waves, in seconds. Period is the time it takes two successive swell wave crests to pass a fixed point.

Units: Seconds.

Method of Measurement: Same as for wind wave period. Count the seconds, preferably with a watch or stopwatch. Note a small object, a peice of seaweed, patch of foam, even a bird floating on the water. Start counting when the object reaches the crest of the first well-formed swell wave. Note the time the object reaches the next crest, and the crest after that. Record the average period for several of the larger, well formed swell waves.

How to Code: Coded directly in seconds. Thus, if the period of the primary swell waves is 12 seconds, $P_{w1}P_{w1}$ is coded as 12. If the period is 7 seconds, $P_{w1}P_{w1}$ is coded as 07.

Remarks: When the swell wavelength is close to the width of the ship, period can be estimated by counting the seconds it takes the ship to "ride the swell", i.e., go from crest to trough and back to crest. This method is especially useful if the swell is coming from abeam the ship (port to starboard or the reverse).

H_{W1}H_{W1}, Height of Primary Swell Waves

Definition: Height of primary swell waves, in units of 0.5 meter. Swell wave height is the vertical distance between trough and crest. The primary swell system has higher waves than the secondary swell.

Units: Half meters.

Method of Measurement: Visual estimate. It is best for the observer to locate on the side of the ship from which the waves are coming. It may help to move up or down in the ship (by changing levels or deck) to obtain the best possible view. On very dark nights, or in dense fog, estimate the height of the swell waves based on the last clear sighting, and whether swell waves have since changed based on the wind speed or ship's motion. On bright moonlit nights, swell waves can often be observed.

How to Code: The code is in units of half meters. Thus, code figure 10 is 10 half meters = 5 meters = 16-17 feet.

Code for Height o	Primary Swell	Waves, H _{W1} H _{W1}
-------------------	---------------	--

Code figs. (½ m)	Height in ft.	Code figs. (½ m)	Height in ft.	Code figs. (½ m)	Height in ft.
00	Less than 1	10	16 or 17	20	32 to 33
01	1 or 2	11	18	21	34 or 35
02	3 or 4	12	19 or 20	22	36
03	5	13	21 or 22	23	37 or 38
04	6 or 7	14	23	24	39 or 40
05	8 or 9	15	24 or 25	25	41
06	10	16	26 or 27	26	42 or 43
07	11 or 12	17	28	27	44 or 45
08	13	18	29 or 30	//	Not
09	14 or 15	19	31		determined

To obtain the code figures for heights over 45 feet, multiply the height in feet by 0.6 and round off the result to the nearest whole number.

Remarks: When determining swell wave characteristics, always select the larger, well formed swell waves of the wave system being observed. These are referred to as the "significant" swell waves.

P_{W2}P_{W2}, Period of Secondary Swell Waves 5, Data Indicator for Period and Height of Secondary Swell Waves

Definition: Period of secondary swell waves, in seconds.

Units: Seconds.

Method of Measurement: Same as for wind wave period. Count the seconds, preferably with a watch or stopwatch. Note a small object, a peice of seaweed, patch of foam, even a bird floating on the water. Start counting when the object reaches the crest of the first well-formed swell wave. Note the time the object reaches the next crest, and the crest after that. Record the average period for several of the larger, well formed swell waves.

How to Code: Coded directly in seconds. Thus, if the period of the primary swell waves is 12 seconds, $P_{w2}P_{w2}$ is coded as 12. If the period is 7 seconds, $P_{w2}P_{w2}$ is coded as 07.

Remarks: When the swell wavelength is close to the width of the ship, period can be estimated by counting the seconds it takes the ship to "ride the swell", i.e., go from crest to trough and back to crest. This method is especially useful if the swell is coming from abeam the ship (port to starboard or the reverse).

H_{W2}H_{W2}, Height of Secondary Swell Waves

Definition: Height of secondary swell waves, in units of 0.5 meter. The secondary swell system has lower waves than the primary swell.

Units: Half meters.

Method of Measurement: Visual estimate. It is best for the observer to locate on the side of the ship from which the swell waves are coming. It may help to move up or down in the ship (by changing levels or deck) to obtain the best possible view. On very dark nights, or in dense fog, estimate the height of the swell waves based on the last clear sighting, and whether swell waves have since changed based on the wind speed or ship's motion. On bright moonlit nights, swell waves can often be observed.

How to Code: The code is in units of half meters. Thus, code figure 10 is 10 half meters = 5 meters = 16-17 feet.

Code for	Height of	Secondary	Swell	Waves.	HwaHwa
0000 101	moignt of	ooooniaa. y	011011	114100,	w2w2

Code figs. (½ m)	Height in ft.	Code figs. (½ m)	Height in ft.	Code figs. (½ m)	Height in ft.
00	Less than 1	10	16 or 17	20	32 to 33
01	1 or 2	11	18	21	34 or 35
02	3 or 4	12	19 or 20	22	36
03	5	13	21 or 22	23	37 or 38
04	6 or 7	14	23	24	39 or 40
05	8 or 9	15	24 or 25	25	41
06	10	16	26 or 27	26	42 or 43
07	11 or 12	17	28	27	44 or 45
08	13	18	29 or 30	//	Not
09	14 or 15	19	31		determined

To obtain the code figures for heights over 45 feet, multiply the height in feet by 0.6 and round off the result to the nearest whole number.

Remarks: When determining swell wave characteristics, always select the larger, well formed swell waves. These are referred to as the "significant" swell waves.

I_s, Cause of Ice Accretion on Ship 6, Data Indicator for Ice Accretion

Definition: I_s is the cause of ice accretion on ship. Ice accretion refers to a deposition of a coating of ice on the ships superstructure or exposed surfaces, from freezing precipitation, ocean spray, supercooled fog, or cloud droplets.

Units:

Method of Measurement: Visual.

How to Code:

Code for Ice Accretion, Is

Code Figures		
1	Icing from ocean spray	
2	Icing from fog	
3	Icing from spray and fog	
4	Icing from rain	
5	Icing from spray and rain	

Remarks: An accumulation of freezing rain, drizzle, sea spray, or fog (rime ice) can be hazardous, especially to smaller vessels. Ice can cause radio or radar failures, due to the icing of aerials. Ice can also cause difficulty in unloading cargo in port if containers and their lashings are frozen to the deck. By reporting this information, you alert the forecasters to this condition, enabling them to broadcast reliable warnings when a danger is foreseen.

E_sE_s, Thickness of Ice Accretion on Ships

Definition: Thickness of ice accretion on ships, in centimeters. Record the maximum thickness observed.

Units: Centimeters.

Method of Measurement: Visual estimate or measured with tape measure or ruler.


How to Code: The code is direct reading in centimeters.

Code for Thickness of Ice Accretion, EsEs

Code figs. (cm)	Inches	Code figs. (cm)	Inches	Code figs. (cm)	Inches
00	Less than ¼	08	3 or 3¼	16	6¼
01	¼ or ½	09	3½	17	6½ or 6¾
02	3/4	10	3¾ or 4	18	7 or 71/4
03	1 to 11/4	11	4¼ or 4½	19	7½
04	1½ or 1¾	12	4 ¾	20	7¾ or 8
05	2	13	5 or 51/4	21	8¼
06	2¼ or 2½	14	5½	22	8½ or 8¾
07	2¾	15	5¾ or 6	23	9 or 9¼

Remarks: Report the actual thickness of the ice in centimeters. If the thickness is 30 cm, code E_sE_s as 30.

R_s, Rate of Ice Accretion on Ships

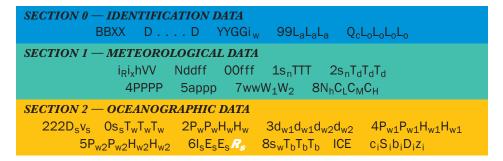

Definition: Rate of ice accretion on ships.

Units:

Method of Measurement: Visual estimate.

How to Code:

Code for Rate of Ice Accretion, Rs

Code Figures		
0	Ice not building up	
1	Ice building up slowly	
2	Ice building up rapidly	
3	Ice melting or breaking up slowly	
4	Ice melting or breaking up rapidly	

Remarks:

s_w, Sign and Method of Determining Wet Bulb Temperature

8, Data Indicator for Wet Bulb Temperature

Definition: Arithmetic sign and how the wet bulb temperature was determined.

Units: Celsius degrees.

Method of Measurement: Psychrometer, either a hand-held sling or an outdoor unit housed in a shelter.

How to Code:

Code for Sign and Type of Wet Bulb Temperature, Sw

Code Figures			
0	Positive or zero measured		
1	Negative measured		
2	Iced bulb measured		
3-4	Not used		
5	Positive or zero computed		
6	Negative computed		
7	Iced bulb computed		

Remarks: Psychrometers must be exposed in a stream of air, fresh from the sea, which has not been in contact with, or passed over the ship, and should be adequetely shielded from radiation, precipitation, and spray. Take your measurement from the windward side of the ship. If using psychrometers housed in an outdoor shelter, one should be installed on each side of the ship.

T_bT_bT_b, Wet Bulb Temperature

```
SECTION 0 — IDENTIFICATION DATA
                                 D.... D YYGGiw
                    BBXX
                                                                      99L<sub>a</sub>L<sub>a</sub>L<sub>a</sub>
                                                                                         Q_cL_oL_oL_oL_o
SECTION 1 — METEOROLOGICAL DATA
                                                                                    2s_nT_dT_dT_d
                         i<sub>R</sub>i<sub>v</sub>hVV
                                         Nddff
                                                       00fff
                                                                     1s<sub>n</sub>TTT
                            4PPPP
                                                          7wwW_1W_2 8N_hC_LC_MC_H
                                           5appp
SECTION 2 — OCEANOGRAPHIC DATA
     222D<sub>s</sub>v<sub>s</sub> 0s<sub>s</sub>T<sub>w</sub>T<sub>w</sub>T<sub>w</sub> 2P<sub>w</sub>P<sub>w</sub>H<sub>w</sub>H<sub>w</sub> 3d<sub>w1</sub>d<sub>w1</sub>d<sub>w2</sub>d<sub>w2</sub> 4P<sub>w1</sub>P<sub>w1</sub>H<sub>w1</sub>H<sub>w1</sub>
               5P_{w2}P_{w2}H_{w2}H_{w2} 6I_sE_sE_sR_s 8s_wT_bT_bT_b ICE c_iS_ib_iD_iz_i
```

Definition: Wet Bulb temperature, in degrees Celsius and tenths.

Units: Celsius degrees.

Method of Measurement: Psychrometer. The thermometers must be read as soon as possible after ventilation or whirling has stopped. Moisten the wet bulb muslin sleeve thoroughly, on all sides, with distilled water, or the purest water available (ordinary water contains dissolved substances which deposit on the wicking as it evaporates, causing the wet bulb to read to high). Change the wicking weekly, or more often if it becomes dirty or contaminated by salt spray.

If using a sling, from the windward side of the ship, whirl the sling psychrometer at a rate of about 4 revolutions per second for about 1 minute. Read the thermometers immediately, then whirl for another 10 seconds, and read again. If the readings are unchanged, record these as your official temperatures. If the readings are different at the second reading, continue the whirling and reading until two successive sets of readings are the same. If using psychrometers in outdoor shelters, install one on each side of the vessel, and read from the windward side.

For temperatures below 0°C, the muslin wicking should be covered with a thin coating of ice. After moistening the muslin with ice cold water, you should initiate the freezing of the water by touching the muslin with a piece of ice, snow, or other cold object. This may need to be done up to a half hour before observation time, to allow enough time for the ice coating to form. Do not allow the coating of ice on the wet bulb to become too thick — this will result in an incorrect reading. If ice is building up, immerse the wet bulb in a small container of warm water to reduce the ice.

How to Code: The code is direct reading in Celsius degrees.


Examples: 11.6°C measured: $\mathbf{T_bT_bT_b} = 116$ and $\mathbf{s_w} = \mathbf{0}$ 3.2°C measured: $\mathbf{T_bT_bT_b} = \mathbf{032}$ and $\mathbf{s_w} = \mathbf{0}$

-4.8°C computed: $T_bT_bT_b = 048$ and $s_w = 6$

Remarks: If possible, shield the psychrometer from precipitation and spray, and from the direct rays of the sun by whirling in the shade. When reading a thermometer, make sure your eye is level with the end of the mercury column.

The wet bulb thermometer works on the principle that water evaporating from the muslin wicking absorbs (removes) heat from the thermometer bulb and mercury. Whirling therefore lowers the temperature of the wet bulb thermometer. The difference between the readings of the dry and wet bulb thermometers is called the depression of the wet bulb.

When the air is very dry, containing little moisture, evaporation will be rapid, and the depression of the wet bulb will be quite large. If the air is very moist, evaporation from the muslin will be slight, and the depression of the wet bulb will be small. At sea, the depression is seldom more than 6°C.

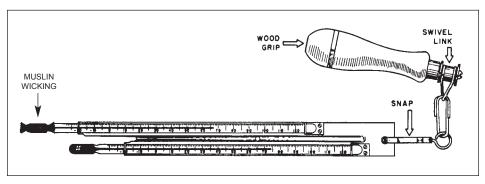

A sling psychrometer.

c_i, Concentration or Arrangement of Sea Ice ICE, Indicator for Sea Ice Concentration

Definition: Concentration or arrangement of sea ice

Units:

Method of Measurement: Visual determination.

How to Code: Code in accordance with the table on the following page.

Remarks: Choose the coding which describes the condition which is of the most navigational significance.

Lead: Any fracture or pass-way through sea ice which is navigable by surface vessels.

Pack ice: Term used in a wide sense to include any area of **sea ice**, other than **fast ice**, no matter what form it takes or how it is disposed.

Sea ice: Any formed ice found at sea which has originated from freezing of sea water.

Pack Ice Coverage

ode Figures		
Open Water	<1/10 (1/8)	
Very Open	1/10 - 3/10 (1/8 < 3/8)	
Open	4/10 - 6/10 (3/8 < 6/8)	
Close	7/10 - 8/10 (6/8 < 7/8)	
Very Close	9/10 - 10/10 (7/8 < 8/8)	
Compact	10/10 (8/8) and no open water visible	
Consolidated	10/10 (8/8) and floes are frozen together	

Code for Concentration or Arrangement of Sea Ice, ci

Code Figures

- **0** No sea ice in sight
- Ship in open lead more than 1 nautical mile wide, or ship in fast ice with boundary beyond limit of visibility
- 2 Sea ice present in concentrations less than % (%); open water or very open pack ice
- 3 % to % (% to less than %); open pack ice
- 4 % to % (% to less than %); close pack ice
- 5 % or more, but not 1% (% to less than %); very close pack ice
- **6** Strips and patches of pack ice with open water between
- 7 Strips and patches of close or very close pack ice with areas of lesser concentration between
- Fast ice with open water, very open or open pack ice to seaward of the ice boundary
- Fast ice with close or very close pack ice to seaward of the ice boundary
- / Unable to report, because of darkness, lack of visibility, or because ship is more than ½ nautical mile away from the ice edge.

Sea ice concentratio n is uniform in the observation area

Sea ice concentratio n is **not** uniform in the observation area

Ship in ice or within 1/2 nautical mile of the ice edge

S_i, Sea Ice Stage of Development

Definition: Stage of Development of Sea ice

Units:

Method of Measurement: Visual determination

How to Code:

Code for Stage of Development of Sea Ice, Si

Code Figures	
- Igaroo	
0	New ice only (frazil ice, grease ice, slush ice, shuga)
1	Nilas or ice rind, less than 10 cm thick
2	Young ice (grey ice, grey-white ice), 10-30 cm thick
3	Predominantly new and/or young ice with some first year ice
4	Predominantly thin first-year ice with some new and/or young ice
5	All thin first-year ice (30-70 cm thick)
6	Predominantly medium first-year ice (70-120 cm thick) and thick
	first-year ice (more than 120 cm thick) with some thinner (younger)
	first-year ice
7	All medium and thick first-year ice
8	Predominantly medium and thick first-year ice with some old ice
	(usually more than 2 meters thick)
9	Predominantly old ice
/	Unable to report, because of darkness, lack of visibility, or because
	only ice of land origin is visible, or because ship is more than
	½ nautical mile away from ice edge
	72 Haddod Himo array Holl 100 dago

Remarks: The code figures represent a series of increasing navigational difficulties for any concentration of sea ice.

b_i, Ice of Land Origin

Definition: Ice of land origin

Units:

Method of Measurement: Visual determination.

How to Code:

Code for Ice of Land Origin, bi

Code Figures	
0	No ice of land origin
1	1-5 icebergs, no growlers or bergy bits
2	6-10 icebergs, no growlers or bergy bits
3	11-20 icebergs, no growlers or bergy bits
4	Up to and including 10 growlers and bergy bits - no icebergs
5	More than 10 growlers and bergy bits - no icebergs
6	1-5 icebergs with growlers and bergy bits
7	6-10 icebergs with growlers and bergy bits
8	11-20 icebergs with growlers and bergy bits
9	More than 20 icebergs with growlers and bergy bits - a major hazard
	to navigation
1	Unable to report, because of darkness, lack of visibility, or because
	only sea ice is visible

Remarks: If only ice of land origin is present, the ice group is coded as $0/b_i/0$; e.g. 0/2/0 would mean 6-10 icebergs in sight, but no sea ice.

D_i, Bearing of Principal Ice Edge

Definition: True bearing of principal sea ice edge.

Units:

Method of Measurement: Visual determination

How to Code:

Code for True Bearing of Principal Ice Edge, Di

Code Figure	es
0	Ship in shore or flaw lead
1	Principal ice edge towards NE
2	Principal ice edge towards E
3	Principal ice edge towards SE
4	Principal ice edge towards S
5	Principal ice edge towards SW
6	Principal ice edge towards W
7	Principal ice edge towards NW
8	Principal ice edge towards N
9	Not determined (ship in ice)
1	Unable to report, because of darkness, lack of visibility, or because only ice of land origin is visible

Remarks: The bearing of the principal ice edge reported should be to the closest part of that edge.

z_i, Present Sea Ice Situation and Three Hour Trend

Definition: Present sea ice situation and trend of conditions over preceeding three hours

Units:

Method of Measurement: Visual determination.

How to Code:

Code for Present Ice Situation and Three Hour Trend, zi

Code Figu	res		
0	Ship in open water with floating ice in sight	_	_
1	Ship in easily penetrable ice; conditions imp	oroving	
2	Ship in easily penetrable ice; conditions not	changing	
3	Ship in easily penetrable ice; conditions worsening		
4	Ship in ice difficult to penetrate; conditions improving		
5	Ship in ice difficult to penetrate; conditions not changing		Ship in ice
6	Ice forming and floes freezing together	Ship in	III ICE
7	Ice under slight pressure	ice difficult to	
8	Ice under moderate or severe pressure	penetrate and	
9	Ship beset	conditions — worsening —	
1	Unable to report, because of darkness,	worsering	
	lack of visibility		

Remarks: Code figures 6-9 represents worsening ice conditions difficult for the ship to penetrate.

Ice Term Definitions

Anchor-ice: Submerged ice attached or anchored to the bottom, irrespective of the nature of its formation.

Bergy Bit: A large piece of floating **glacier ice**, generally showing less than 5 m above sea level but more than 1 m and normally about 100-300 m² in area.

Beset: Situation of a vessel surrounded by ice and unable to move.

Brash ice: Accumulations of **floating ice** made up of fragments not more than 2 m across, the wreckage of other forms of ice.

Calving: The breaking away of a mass of ice from an ice wall, ice front, or iceberg.

Close pack ice: Pack ice in which the concentration is 7/10 to 8/10 (6/8 to less than 7/8), composed of *floes* mostly in contact.

Compacted ice edge: Close, clear-cut ice edge compacted by wind or current; usually on the windward side of an area of pack ice.

Compact pack ice: Pack ice in which the concentration is 10/10 (8/8) and no water is visible.

Concentration: The ratio expressed in tenths or oktas describing the mean areal density of ice in a given area.

Consolidated pack ice: Pack ice in which the concentration is 10/10 (8/8) and the floes are frozen together.

Dark nilas: Nilas which is under 5 cm in thickness and is very dark in color .

Diffuse ice edge: Poorly defined **ice edge** limiting an area of dispersed ice; usually on the leeward side of an area of **pack ice**.

Fast ice: Sea ice which forms and remains fast along the coast, where it is attached to the shore, to an ice wall, to an ice front, between shoals or grounded icebergs. Vertical fluctuation may be observed during changes of sea level. Fast ice may be formed in situ from sea water or by freezing of pack ice of any age to the shore, and it may extend a few meters or several hundred kilometers from the coast. Fast ice may be more than one year old and may then be prefixed with the appropriate age category (old, second-year, or multi-year). If it is thicker than about 2 m above sea level it is called ice shelf.

Finger rafting: Type of **rafting** whereby interlocking thrusts are formed, each **floe** thrusting 'fingers' alternately over and under the other. Common in **nilas** and **grey ice**.

First-year ice: Sea ice of not more than one winter's growth, developing from young ice: thickness 30 cm- 2 m. May be subdivided into thin first-year ice/white ice, medium first-year ice, and thick first-year ice.

Flaw Lead: A passage-way between pack ice and fast ice which is navigable by surface vessels.

Floating ice: Any form of ice found floating in water. The principal kinds of floating ice are **lake ice**, **river ice**, and **sea ice**, which forms by the freezing of water at the surface, and **glacier ice** (**ice of land origin**) formed on land or in an **ice shelf**. The concept includes ice that is stranded or grounded.

Floe: Any relatively flat piece of **sea ice** 20 m or more across. Floes are sub-divided according to horizontal extent as follows:

 Giant:
 Over 5.4 n. mile across

 Vast:
 1.1-5.4 n. mile across

 Big:
 500-2000 m across

 Medium:
 100-500 m across

 Small:
 20-100 m across

Floeberg: A massive piece of sea ice composed of a hummock, or a group of hummocks, frozen together and separated from any ice surroundings. It may float up to 5 m above sea level.

Fracture: Any break or rupture through **very close pack ice**, **compact pack ice**, **consolidated pack ice**, **fast ice**, or a single **floe** resulting from deformation processes. Fractures may contain **brash ice** and/or be covered with **nilas** and/or **young ice**. Length may vary from a few meters to many nautical miles.

Frazil ice: Fine spicules or plates of ice, suspended in water.

Glacier. A mass of snow and ice continuously moving from higher to lower ground or , if afloat, continuously spreading. The principal forms of glaciers are: inland ice sheets, *ice* **shelves**, **ice streams**, ice caps, ice piedmonts, cirque glaciers and various types of mountain (valley) glaciers.

Glacier berg: An irregularly shaped i ceberg.

Glacier ice: Ice in, or originating from, a **glacier**, whether on land or floating on the sea as **icebergs**, **bergy bits**, or **growlers**.

Grease ice: A later stage of freezing than **frazil ice** when the crystals have coagulated to form a soupy layer on the surface. Grease ice reflects little light, giving the sea a matt appearance.

Grey ice: **Young ice** 10-15 cm thick. Less elastic than **nilas** and breaks on swell. Usually **rafts** under pressure.

Grey-white ice: Young ice 15-30 cm thick. Under pressure likely to ridge than to raft.

Growler: Smaller piece of ice than a **bergy bit** or **floeberg**, often transparent but appearing green or almost black in color, extending less than 1 m above the sea surface and normally occupying an area of about 20m².

Hummock: A hillock of broken ice which has been forced upwards by pressure. May be fresh or weathered. The submerged volume of broken ice under the hummock, forced downwards, is termed a bummock.

Iceberg: A massive piece of ice greatly varying in shape, more than 5 m above sea level, which has broken away from a *glacier*, and which may be afloat or aground. Icebergs may be described as tabular, domed-shaped, sloping, pinnacled, weathered or *glacier bergs*.

Ice boundary. The demarcation at any given time between *fast ice* and *pack ice* or between areas of *pack ice* of different concentrations (*cf. ice edge*).

Ice edge: The demarcation at any given time between the open sea and *sea ice* of any kind, whether fast or drifting. It may be termed *compacted* or *diffused* (cf. ice boundary).

Ice front. The vertical cliff forming the seaward face of an *ice shelf* or other floating glacier varying in height from 2 to 50 m or more above sea level (cf. ice wall).

Ice of land origin: Ice formed on land or in an *ice shelf*, found floating in water. The concept includes ice that is stranded or grounded.

Ice patch: An area of pack ice less than 5.4 n. mile across.

Ice rind: A brittle shiny crust of ice formed on a quiet surface by direct freezing or from *grease ice*, usually in water or low salinity. Thickness to about 5 cm. Easily broken by wind or swell, commonly breaking in rectangular pieces.

Ice shelf. A floating ice sheet of considerable thickness showing 2-50 m or more above sea level, attached to the coast. Usually of great horizontal extent and with a level or gently undulating surface. Nourished by annual snow accumulation and often also by the seaward extension of land *glaciers*. Limited areas may be ground. The seaward edge is termed an *ice front*.

Ice stream: Part of an inland ice sheet in which the ice flows more rapidly and not necessarily in the same direction as the surrounding ice. The margins are sometimes clearly marked by a change in direction of the surface slope but may be indistinct.

Ice under pressure: Ice in which deformation processes are actively occurring and hence a potential impediment or danger to shipping.

Ice wall: An ice cliff forming the seaward margin of a *glacier* which is not afloat. An ice wall is aground, the rock basement being at or below sea level (cf. *ice front*).

Lake ice: Ice formed on a lake, regardless of observed location.

Lead: Any fracture or pass-way through sea ice which is navigable by surface vessels.

Light nilas: *Nilas* which is more than 5 cm in thickness and rather lighter in color than dark nilas.

Medium first-year ice: First-year ice 70-120 cm thick.

Multi-year ice: **Old ice** up to 3 m or more thick which has survived at least two summer's melt. **Hummocks** even smoother than in **second-year ice**, and the ice is almost salt-free. Color, where bare, is usually blue. Melt pattern consists of large interconnecting irregular **puddles** and a well-developed drainage system.

New ice: A general term for recently formed ice which includes **frazil ice**, **grease ice**, **slush**, and **shuga**. These types of ice are composed of ice crystals which are only weakly frozen together (if at all) and have a definite form only while they are afloat.

Nilas: A thin elastic crust of ice, easily bending on waves and swell and under pressure, thrusting in a pattern of interlocking 'fingers' (**fingers rafting**). Has a matt surface and is up to 10 cm in thickness. May be subdivided into **dark nilas** and **light nilas**.

Old ice: *Sea ice* which has survived at least one summer's melt. Most topographic features are smoother than *first-year ice*. May be subdivided into *second-year* and *multi-year ice*.

Open pack ice: *Pack ice* in which the ice concentration is 4/10 to 6/10 (3/8 to less than 6/8), with many *leads* and *polynyas*, and the *floes* are generally not in contact with one another.

Open water. A large area freely navigable water in which *sea ice* is present in concentrations less than 1/10 (1/8). There may be *ice of land origin* present, although the total concentration of all ice shall not exceed 1/10 (1/8).

Pack ice: Term used in a wide sense to include any area of sea ice, other than fast ice, no matter what form it takes or how it is disposed.

Polynya: Any non-linear shaped opening in ice. Polynyas may contain **brash ice** and/or be covered with **new ice**, **nilas** or **young ice**; submariners refer to these as skylights. Sometimes the polynya is limited on one side by the coast and is called a shore polynya, or by fast ice and is called a flaw polynya. If it recurs in the same position every year, it is called a recurring polynya.

Puddle: An accumulation on ice of melt-water, mainly due to melting snow, but in the more advanced stages also to the melting of ice. Initial stage consists of patches of melted snow.

Rafting: Pressure process whereby one piece of ice overrides another. Most common in **new** and **young ice**. (cf. **finger rafting**).

Ridging: The pressure process in which sea ice is forced into ridges, i.e. a line or wall of broken ice forced up by pressure.

River ice: Ice formed on a river, regardless of observed location.

Sea ice: Any formed ice found at sea which has originated from freezing of sea water .

Second-year ice: **Old ice** which has survived only one summer's melt. Because it thicker and less dense than **first-year ice**, it stands higher out of the water. In contrast to **multi-year ice**, summer melting produces a regular pattern of numerous small puddles. Bare patches and **puddles** are usually greenish-blue.

Shuga: An accumulation of spongy white ice lumps, a few centimeters across; they are formed from *grease ice* or *slush* and sometimes from *anchor-ice* rising to the surface.

Slush: Snow which is saturated and mixed with water on land or ice surfaces, or as a viscous floating mass in water after a heavy snowfall.

Strip: Long narrow area of *pack ice* about 0.5 n. mile or less in width, usually composed of small fragments detached from the main mass of ice, and run together under the influence of wind, swell, or current.

Tabular berg: A flat-topped *iceberg*. Most tabular bergs form by *calving* from an i*ce shelf* and snow horizontal banding.

Thick first-year ice: First-year ice over 120 cm thick.

Thin first-year ice/white ice: First-year ice 30-70 cm thick.

Very close pack ice: **Pack ice** in which the concentration is 9/10 to less than 10/10 (7/8 to less than 8/8).

Very open pack ice: Pack ice in which the concentration is 1/10 to 3/10 (1/8 to less than 3/8) and water preponderates over ice.

Young ice: Ice in the transition stage between *nilas* and *first-year ice*, 10-30 cm in thickness. May be subdivided into *grey ice* and *grey-white ice*.

Chapter 3 — Transmitting the Observation

IMPORTANCE OF TIMELY TRANSMISSION

Your weather observations are used by meteorologists preparing weather forecasts for coastal, offshore, and high seas areas. They are essential to the production of weather charts and analyses for marine areas. It is very important that observations be transmitted quickly. It is best to transmit reports within moments after the observation has been taken — on or within a very short time after the reporting hour. This generally ensures that the report will arrive in time for use by the marine forecaster. If ship operations prevent transmission at or near the reporting hour, send the report as soon as you can, but no later than 3 hours after the time of observation.

STATIONS ACCEPTING VOS WEATHER OBSERVATIONS

Weather observations sent by ships participating in the VOS program are sent at no cost to the ship except as noted.

The stations listed accept weather observations which enter an automated system at National Weather Service headquarters. This system is not intended for other types of messages. To communicate with NWS personnel, see phone numbers and e-mail addresses at the beginning of this manual.



INMARSAT

INMARSAT "B"

Follow the instructions with your INMARSAT terminal for sending a telex message. Use Special Access Code 41 (except when using the AMVER/SEAS software in compressed binary format with INMARSAT "C" units), and do not request a confirmation when sending. No cost is involved with this transmission.

Below is a typical procedure for using an INMARSAT "B" terminal.

- Select appropriate Land Earth Station Identity (LES-ID).
 *See table below.
- 2. Select routine priority.
- 3. Select duplex telex channel.
- 4. Initiate the call. Wait for the GA+ signal.
- 5. Select the dial code for meteorological reports, 41+.
- 6. Upon receipt of our answerback, NWS OBS MHTS, transmit the weather message starting with BBXX and the ship's call sign. The message must be ended with 5 periods. Do not send any preamble.

GA+

41+

NWS OBS MHTS

BBXX WLXX 29003 99131 70808 41998 60909 10250 2021/ 4011/52003 71611 85264 22234 00261 20201 31100 40803.....

The 5 periods indicate the end of the message, and must be included after each report. Do not request a confirmation.

INMARSAT "C"

All major INMARSAT "C" terminals have the ability to transmit the encoded weather observation (BBXX) with the Special Access Code 41. No cost is involved with this transmission. Do not request a confirmation when sending. The detailed instructions necessary to setup and address the Code 41 message and transmission instruction according to the different manufactures are listed on our Website at http://www.vos.noaa.gov in the VOS Ship Resource Page.

* Land-Earth Station Identity (LES-ID) of U.S. Inmarsat Stations Accepting Ships Weather (BBXX) and Oceanographic (JJYY) Reports

Operator	Service	Station ID			
		AOR-W	AOR-E	IOR	POR
VIZADA	В	004	004	004	004
VIZADA	С	004	104	304	204
VIZADA	C (AMVER/SEAS)	004	104	304	204

Some common mistakes include (1) failure to end the message with 5 periods when using INMARSAT "B", (2) failure to include BBXX in the message preamble, (3) incorrectly coding the Date, Time, Latitude, Longitude, or quadrant of the globe, (4) requesting a confirmation (which increases cost to NWS).

Using AMVER/SEAS Software

The National Oceanic and Atmospheric Administration (NOAA) and the U. S. Coast Guard (USCG) have created software to assist Volunteer Observing Ships (VOS) in submitting weather reports to worldwide weather networks, and to participate in the Automated Mutual (assistance) Vessel Rescue (AMVER) system. The VOS program (SEAS) allows commercial ships around the world to return marine weather observations to the National Weather Service (at no charge to the vessel). The AMVER system allows ships to report their intended track so in the event of an emergency all available resources can be focused on aiding ship(s) in distress.

The **U.S. Coast Guard and NOAA pay all transmission costs**, provided messages are sent to the INMARSAT C address specified in this user's guide.

Weather observations should be reported at **0000**, **0600**, **1200**, **and 1800 UTC**. Ships are also encouraged to submit reports at 0300, 0900, 1500 and 2100 UTC. Each weather observation is also processed as a **position report** then sent to the Coast Guard AMVER Center.

A typical voyage utilizing the **AMVER/SEAS~MET** program would require the submission of an AMVER Sail Plan before departure, submission of Weather Observations four times per day and the submission of an Arrival Report. The U. S. Coast Guard updates their database with the position information from these reports, which allows them to identify vessels in the vicinity of a ship(s) in distress.

Ships that follow the same routes repeatedly have an additional benefit since Sail Plans can be stored in the computer system, recalled later to change the date and time of departure, rather than creating a new plan each time.

Note: To obtain the AMVER/SEAS~Met software program contact a U.S. PMO listed at the beginning of this handbook. Visit our Website at http://www.vos.noaa.gov and click on AMVER/SEAS software on the left side of the page for more information.

Common errors when using the AMVER/SEAS~Met software

- Sending the compressed binary message via the Special Access Code 41.
- Sending a plain text message via the AMVER/SEAS address.
- Only VIZADA can accept the AMVER/SEAS messages in binary format.
- Do not attempt to view the file with the Text Editor. (This will added unwanted characters to the message and corrupt the file)
- Do not send from the Text Editor.
- Send with the CONFIRMATION request turned OFF.

Instructions for sending weather observations using Standard C and Code 41 (no charge to ship):

JRC (JAPANESE RADIO COMPANY)

STANDARD "C"

- It is necessary to setup an address for the AMVER/SEAS message in the Standard C software.
 The SETUP procedure provided below is a one-time process to be completed on initial
 installation.
- The TRANSMISSION instructions provided below are to be followed each time a message is transmitted.
- 3. These instructions may vary slightly, depending on the software version and hardware.

SETUP AND TRANSMISSION PROCEDURES

- At the MAIN MENU select TRANSMIT. Select SPECIAL ACCESS NETWORK and Press <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL ACCESS NETWORK and Press
 <enter in the select SPECIAL
 - The SPECIAL ACCESS NETWORK window appears. Press <ENTER>. Type in the word SEAS and Press <ENTER>.
 - o Ensure **FILE NAME:** A:\MET.BIN (Or Other Appropriate File) By using A:\ you are telling the program to read the file on the diskette and not the text in editor.
 - Arrow down to LAND EARTH STATION and Press <ENTER>. Type in your LES/CES CODE corresponding to your ships location and press <ENTER>

0	AOR (W)	Southbury	004
0	AOR (E)	Southbury	104
0	POR	Santa Paula	204
0	IOR	Eik (Oslo)	304

*********** No other stations can relay the messages **************

- o Ensure POSITION: OFF
- Arrow down to CHARACTER CODE <ENTER>. Use the Arrow key to Highlight DATA. (Ensure this is completed, because you are transmitting a Binary message)
- Arrow down to DELIVERY CONFIRMATION and Press <ENTER>. Use the Arrow Key to highlight OFF and Press <ENTER>.
- 2. Press F1 (This will SEND THE MESSAGE).

NOTE: The following are the **FILE NAME** for each particular message.

-Meteorological Observation	MET.BIN
—Sail Plan	SP.BIN
—Arrival Report	FR.BIN
—Deviation Report	DR.BIN
—Administrative Report	ADMIN.BIN

CODE 41

- It is necessary to set up an address for the Code 41 message in the Standard C software. The SETUP procedure provided below is a one-time process to be completed on initial installation.
- The TRANSMISSION instructions provided below are to be followed each time a message is transmitted.
- 3. These instructions may vary slightly, depending on the software version and hardware.

SETUP PROCEDURES

- At the MAIN MENU highlight EDIT and Press <ENTER>. A small window will appear in the middle of the Main Menu Screen. Select EDIT ASCII FILE and Press <ENTER>.
- A small window appears which is called EDIT ASCII FILE. At the cursor enter a file name: "WEATHER OBS" and Press <ENTER>.
- The next screen will allow you to EDIT a message. Type in your Meteorological Observation in the proper format. (BBXX). Press F9 (This SAVES the information). Press ESC (Go back to Main Menu).

TRANSMISSION PROCEDURES

- At the MAIN MENU select TRANSMIT. Select SPECIAL ACCESS NETWORK. and Press <ENTER>.
 - The SPECIAL ACCESS NETWORK window appears. Press <ENTER>. Type in the number "41" and Press <ENTER>.
 - o Arrow down to **LAND EARTH STATION** and Press <ENTER>. Type in your **LES/CES ID** and Press <ENTER>. (Your LES/CES ID will be determined by your location in relation to the FOOT PRINT of the satellite.)
 - Arrow down to **DELIVERY CONFIRMATION** and Press <ENTER>. Use the Arrow Key to highlight **OFF** and Press <ENTER>.
- 2. Press F1 (This will SEND THE MESSAGE).
 - When completing the Next Observation go to EDIT the ASCII FILE and EDIT the previous Observation BBXX and SAVE the FILE and SEND the message through the SPECIAL ACCESS NETWORK.

THRANE AND THRANE

STANDARD "C"

*******	IMPORTANT	*********
---------	------------------	-----------

- It is necessary to setup an address for the AMVER/SEAS message in the Standard C software.
 The SETUP procedure provided below is a one-time process to be completed on initial
 installation.
- The TRANSMISSION instructions provided below are to be followed each time a message is transmitted.
- 3. These instructions may vary slightly, depending on the software version and hardware.

SETUP PROCEDURES

- At the MAIN MENU highlight APPLICATION option and Press . Select ADDRESS BOOK and Press <ENTER>. Select NEW in Address Book and Press <ENTER>.
- At the EDIT ADDRESS section type in NEW NAME of file. (Example name: AMVER/SEAS and Press <ENTER>
 - There is a DOT in front of the TELEX [(.) Telex] located on the right side of the screen. Move the DOT to SPECIAL by using the Arrow key. Once the SPECIAL is Highlighted, press the SPACE BAR. (This will place the DOT in the SPECIAL Address)
 - The terminal defaults to 7 Bit for all services, use the space bar to select 8-BIT.
 Press <ENTER>
 - At the Bottom of the screen a Box will appear to enter the SPECIAL ACCESS CODE. Type in the word SEAS in this field and Press <ENTER>.
 - o Tab to "OK". Press <ENTER>. (The Address is now saved)
 - o Press ESC twice to reach the Main Menu.

SETUP AND TRANSMISSION PROCEDURES

- 1. At the **MAIN MENU** highlight **TRANSMIT** and Press <ENTER>. Press the space bar to open the Address book with the address created during setup.
- 2. Highlight AMVER/SEAS address file and Press <ENTER>
- The cursor should be on the Land Station field. Press the space bar to view the station list. Highlight the correct CES/LES and Press <ENTER> to accept.

4.	AOR (W)	Southbury	004
5.	AOR (E)	Southbury	104
6.	POR	Santa Paula	204
7.	IOR	Eik (Oslo)	304

- 8. Tab the cursor to the "TEXT IN EDITOR" field which will be marked with an "X". Press the space bar to remove the "X" and the word "FILE" will appear.
- Highlight the FILE option and press the space bar to display a list of files located on the diskette. Highlight the appropriate file name and press <ENTER>.
- Highlight the REQUEST CONFIRMATION option and press the space bar to remove the "X".
 Move the cursor to SEND and press <ENTER>.

NOTE: The following are the FILE NAME for each particular message.

-Meteorological Observation	MET.BIN
—Sail Plan	SP.BIN
—Arrival Report	FR.BIN
—Deviation Report	DR.BIN
—Administrative Report	ADMIN.BIN

CODE 41

***********	IMPORTANT	**********
-------------	------------------	------------

- It is necessary to setup an address for the Code 41 message in the Standard C software. The SETUP procedure provided below is a one-time process to be completed on initial installation.
- 2. The TRANSMISSION instructions provided below are to be followed each time a message is transmitted.
- 3. These instructions may vary slightly, depending on the software version and hardware.

SETUP PROCEDURES

- At the MAIN MENU highlight APPLICATION option and Press <ENTER>. Select ADDRESS BOOK and Press <ENTER>. Select NEW in Address Book and Press <ENTER>.
- At the EDIT ADDRESS section type in NEW NAME of file. (Example name: WEATHER OBS) and Press <ENTER>.
 - There is a DOT in front of the TELEX [() Telex] located on the right side of the screen.
 - Move the DOT to SPECIAL by using the Arrow key. Once the SPECIAL is Highlighted Press the SPACE BAR. (This will place the DOT in the SPECIAL Address)
 - At the Bottom of the screen a Box will appear to enter the SPECIAL ACCESS CODE. Enter the number 41 and Press <ENTER.
 - o Set the BIT to 7, if it is not already done and Press <ENTER>.
 - o The CURSOR should be at "OK". Press <ENTER>. (The Address is now saved).

TRANSMISSION PROCEDURES

- At the MAIN MENU highlight FILE and Press <ENTER>. Select NEW ASCII or NEW TELEX and Press <ENTER>. Type in your Meteorological Observation in the proper format.
- When finished entering the Observation Press ESC and this will return to the Main Menu. At the MAIN MENU highlight FILE and Press <ENTER>. Arrow down to SAVE and Press <ENTER>. Name the FILE on the MSG such as "WEATHER OBS" and Press <ENTER>.
- At the MAIN MENU highlight TRANSMIT and Press <ENTER>. Select SEND and Press <ENTER>. (This will transmit the MSG) NOTE: Please turn the CONFIRMATION OFF.
 - When completing the Next Observation go to FILE and Press <ENTER>. Highlight LOADFILE and select the previous Observation BBXX and EDIT the same file and Transmit the file

FURUNO

STANDARD "C"

- It is necessary to setup an address for the AMVER/SEAS message in the Standard C software.
 The SETUP procedure provided below is a one-time process to be completed on initial
 installation.
- The TRANSMISSION instructions provided below are to be followed each time a message is transmitted.
- 3. These instructions may vary slightly, depending on the software version and hardware.

NOTE: Furuno first started installing the ***FELCON 11*** model hardware in the middle 90's for their version of the INMARSAT "C" to work with the GMDSS. This model could not generate a Binary message to be used with our AMVER/SEAS software.

The Furuno company has updated their hardware to the *FELCOM 12*. This new hardware will allow an AMVER/SEAS Binary message to be transmitted on their INMARSAT "C"

SETUP PROCEDURE

 At the FURUNO Main Menu, Press F8 (SETUP). The SETUP WINDOW menu comes up on the screen.

- Select NO.9 (CONFIGURATION) and Press <ENTER>. Select NO.1 (STATION LIST) and press <ENTER>. Arrow down to a blank file number at the end of the list and Press <ENTER>.
- 3. A window appears asking for: Use <ENTER> when line is highlighted to type in information and press to accept typed in data. Use arrow keys to get to next line.
 - o Station Name: Enter --- AMVER/SEAS
 - o Arrow down to DESTINATION TYPE: Select SPEC
 - Arrow down to STATION ID: Enter in the word SEAS. Leave the Prefix and Country Code Blank.
 - o Arrow down to REMARKS: Enter AMVER/SEAS,/B> and press <ENTER>.
- 4. Press ESC until you return to the FURUNO MAIN MENU.
- Insert the diskette with the BINARY message that was generated with the AMVER/SEAS program.
- Press F3 (TRANSMIT). Select NO. 1 (TRANSMIT MSG) and Press <ENTER>. The Transmit Message window appears.
 - Arrow DOWN to MESSAGE FILE and Press <ENTER>. This will allow you to see
 the files stored on the diskette. Select the APPROPRIATE FILE message and
 Press <ENTER>.
 - Arrow DOWN to STATION NAME and Press <ENTER>. Select STATION AMVER/SEAS and Press <ENTER>.
 - Arrow DOWN to CES/LES ID and Press <ENTER>. Select the proper LES/CES and Press <ENTER>. AOR (W) Southbury 004, AOR (E) Southbury 104, POR Santa Paula 204 and IOR Eik (Oslo) 304.
 - Arrow DOWN to OPTION and Press <ENTER>. Arrow down to CONFIRMATION
 and select OFF and Press <ENTER>. Arrow down to CODE and Press
 <ENTER>. Select the word DATA and Press <ENTER>. (Ensure DATA is
 selected, because the AMVER/SEAS message is sent as a BINARY message.)
 - Press . Arrow DOWN to TRANSMIT and Press <ENTER>. A small SEND START window appears and SELECT YES and Press <ENTER>. The message is now being sent through the satellite.
- 3. To see the Status of the Message being sent Press F6 (LOGS).

NOTE: The following are the **FILE NAME** for each particular message.

—Meteorological Observation	MET.BIN
—Sail Plan	SP.BIN
—Arrival Report	FR.BIN
—Deviation Report	DR.BIN
—Administrative Report	ADMIN.BIN

CODE 41

- It is necessary to setup an address for the Code 41 message in the Standard C software. The SETUP procedure provided below is a one-time process to be completed on initial installation.
- 2. The TRANSMISSION instructions provided below are to be followed each time a message is transmitted.
- 3. These instructions may vary slightly, depending on the software version and hardware.

SETUP PROCEDURES

 At the NORMAL STANDBY Position Press F1 (FILE). A small window will appear and Highlight No. 1: New (ALT-N) and Press <ENTER>.

- A larger window appears. At the cursor type in your Meteorological Observation in the proper format. (BBXX) Press F1 (SAVES MESSAGES).
- o A small window appears. Arrow down to 5: (SAVE ALT-S) and Press <ENTER>.
- A small window appears in the upper left corner titled SAVE FILE NAME. Enter a Name on the file such as "WEATHER OBS" and Press <ENTER> (SAVED MESSAGE).

TRANSMISSION PROCEDURES

- Press F3 (SEND/REC): A small window appears in upper left corner. Highlight No.1 (SEND) and Press <ENTER>.
 - Another window appears to the right of TITLE TO SEND MESSAGE. Highlight No. 1 (SEND MESSAGE) and Press <ENTER>.
- 2. The **SEND MESSAGE** window appears.
 - o Arrow down to **DESTINATION TYPE** and Highlight "SPEC".
 - o Arrow down to STATION ID and Type in "41".
 - Arrow down to CES ID and type in the LES/CES ID. (Your LES/CES ID will be determined by location in relation to the FOOT PRINT of the satellite.)
 - o Arrow down to **CONFIRMATION** and select **OFF** and Press <ENTER>.
- 3. A small window appears titled **SEND START**. Highlight **YES** and Press <ENTER>.
 - o At the bottom of the screen it will say: MESSAGE IS ENTERED IN SENDING BUFFER
 - o A window will appear saving: SUCCESSFUL SENDING MESSAGE.
 - o The lower left corner of the screen will show the **STATUS** of the message.
- 4. When completing the Next Observation go to FILE and to OPEN and Press <ENTER>. Highlight the last WEATHER OBS message and Press <ENTER>. EDIT the last message and TRANSMIT the message.
- *Note*: If your vessel has a Trimble unit please send an e-mail to U.S. VOS or any PMO requesting the procedures and we will provide them for you.

To keep pace with increasingly widespread use of e-mail in today's commercial shipping industry the U.S. VOS program has developed a means for ships to transmit weather observations via e-mail. The ship will incur the nominal cost when utilizing this method. The procedures are outlined below.

SENDING SHIP OBSERVATIONS VIA E-MAIL

- 1. Take an observation using the AMVER/SEAS 2000 software.
 - o Place a diskette (1.44mb or 720 kb) in the A: drive of the computer.
- 2. After entering the observation data, select QUICKFORM.
 - At the top of the QUICKFORM, select TRANSMIT from the left hand screen and arrow down to SAVE ASCII.
- The SAVE AS dialog box is brought up. At the SAVE IN dialog line, use the down arrow and change location to "Floppy Disk, (A:)".
 - o Select **SAVE** on lower right hand side of the dialog box. (This clears the box and saves an Ascii text version of the observations to the diskette.)
- Select CANCEL to close the "Quickform". It will ask you: "Do you want to cancel and lose all data". Select YES. (Note: The data is always archived on the hard drive, regardless.)
- 5. Using My Computer, open the A: drive. There should be a notepad file on the diskette called MET or MET.TXT. Open it by double clicking on the icon. The synoptic observation will appear like this:

BBXX WCY6777 15124 99559 71459 41496 82324 10075 20048 40123 57031 76162 86827 22262 00042 20302 32433 40806

51003 6//// 80062 ICE /////

- HIGHLIGHT the complete message. Using the right mouse button, select COPY.
 (Note: Close the notepad window and select "Yes" to save the changes to the observation.)
- 7. Open your e-mail account and start an e-mail message.
 - Using the right mouse button PASTE the observation inside the e-mail message. (Include the entire weather message including the letters BBXX at the start of the message)
 - o You MUST include an equal sign (=) to the end of the observation. This is to allow the computers to know that the transmission has ended. Your final observation message should look like this:

BBXX WCY6777 15124 99559 71459 41496 82324 10075 20048 40123 57031 76162 86827 22262 00042 20302 32433 40806 51003 6/// 80062 ICF ////=

DO NOT SEND AS AN ATTACHMENT TO THE E-MAIL. THE
OBSERVATION MUST BE SENT WITHIN THE BODY OF THE E-MAIL.

7. SEND THE E-MAIL TO: shipobs@noaa.gov

GREAT LAKES REGION PROCEDURES

Email observations using address above

24/7 NDBC Call Center phone,(800-990-6433)

Web page entry tool – DMAWDS address connection http://erh.noaa.gov/dmawds/vos.html

* For web access through DMAWDS, contact the Great Lakes Port Meteorological Officer at PMOGlakes@noaa.gov, or 815-922-9757.

ALASKA REGION PROCEDURES

NWS Alaska Offices to contact to relay marine weather observations for transmission

National Weather Service Annette Island Office (907) 886-3241 VHF Channel 16 HF Radio Channel 4125 kHz

National Weather Service Barrow Office (907) 852-3101 VHF Channel 16 HF Radio Channel 4125 kHz

National Weather Service Bethel Office (907) 543-2236 VHF Channel 16

National Weather Service Cold Bay Office (907) 532-2448 VHF Channel 16 HF Radio Channel 4125 kHz National Weather Service King Salmon Office (907) 246-3303 VHF Channel 16 HF Radio Channel 4125 kHz

National Weather Service Kodiak Office (907) 487-2102 VHF Channel 16 HF Radio Channel 4125 kHz

National Weather Service Kotzebue Office (907) 442-3231 VHF Channel 16

National Weather Service Nome Office (907) 443-2321 VHF Channel 16 HF Radio Channel 4125 kHz

National Weather Service St. Paul Island Office (907) 546-2215 VHF Channel 9

National Weather Service Valdez Office (907) 784-3322 VHF Channel 16 Wireless Matrix Satellite Phone Number 9999

National Weather Service Yakutat Office (907) 784-3322 VHF Channel 16 HF Radio Channel 4125 kHz Wireless Matrix Satellite Phone Number 9998

Email observations using address above

Website to submit marine observation (MAROBS) is: http://pajk.arh.noaa.gov/marine/marob.htm

Kodiak Alaska Weather Radiofacsimile Station NOJ Continuous Broadcast Frequencies: 2054, 4298, 8459, 12412.5 kHz

Chapter 4 — The Weatherwise Mariner

A man who is not afraid of the sea will soon be drowned, for he'll be going out on a day he shouldn't. But we do be afraid of the sea, and we do only be drowned now and again.

From The Arran Islands by J. M. Synge

Nothing affects the mariner as completely as does the weather. Anticipating changes to both weather and sea conditions can be of critical importance. To forecast what lies ahead you should capitalize on every available lead to future weather. This includes (1) understanding your own observations, and how to interprete them, (2) heeding professionally prepared weather forecasts and storm warnings, (3) studying marine weather and climatological summaries or atlases, and (4) making use of weather charts and analyses available via radiofacsimile.

SHIPBOARD OBSERVATIONS AS A GUIDE TO FUTURE WEATHER CONDITIONS

Your observations are dependable guides in determining future weather conditions. The following factors should be considered when making a forecast:

Pressure and pressure changes

Pressure changes, or a lack thereof, are very significant weather indicators. The approach of a low pressure or frontal system, tropical depression, storm, or hurricane is heralded by falling pressure. A steady, persistent drop in pressure normally indicates that foul weather is on the way. Be particularly wary of a rapid or sudden pressure fall of considerable magnitude. A steady and persistent rise in pressure is indicative of a period of settled or stable weather. Steep pressure rises and falls are often accompanied by strong wind. The passage of a front is often marked by a fall and subsequent steadying of pressure, or a fall followed by a rise in pressure. High pressures accompanied by slow pressure changes usually indicate a location within or near the center of a large high pressure area.


Wind

Wind shifts are very meaningful, and usually foretell a change in the weather. If, during stormy conditions, the wind shifts from the east, southeast, or northeast, to the west, northwest, or north (in the northern hemisphere), the weather should soon begin to clear. During fair weather, if the wind shifts from the west, southwest, or northwest, to the east, northeast, or southeast, (in northern hemisphere middle latitudes), a deterioration in weather conditions is likely (especially with a falling barometer). In general (but not always), fair weather comes with a wind from the southwest, west, or northwest, and unsettled weather is usually associated with wind from the east, southeast, or northeast (all wind directions are reversed for the southern hemisphere).

Clouds and the state of the sky

Clouds are very important indicators of existing weather conditions, and also provide early clues to impending changes. Of particular significance is the sequence or progression of cloud formations observed over several hours or more. In advance of storms (including mid latitude cyclones or low pressure areas, tropical depressions, storms, or hurricanes), a typical cloud progression would be (1) high cirrus clouds several hundred miles or more in advance of the storm center, (2) if the storm is moving closer, cirrus will thicken to become cirrostratus, and then, when the storm is only a few hundred miles away, the darker altostratus, (3) If the altostratus develop into stratocumulus, or especially nimbostratus, the storm is getting closer, rain will begin to fall and wind speed should increase. The duration and intensity of storms can vary greatly; by using cloud sequences together with other indicators such as pressure and wind direction, you will obtain a good idea of what conditions to expect.

Vertical section of clouds ahead of a low. If a warm front is present, it will lie along the dashed lines.

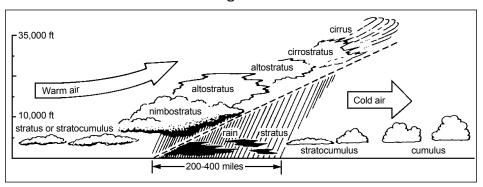

Cumiliform clouds should also be closely watched. Cumulus with sharp or hard edged cauliflower-like tops are still growing and rising vertically. Cumulus with indistinct or fluffy tops have probably stopped rising and should not pose any threat. Sometimes cumulus is seen to develop strongly to start with, then flatten out into a layer. This indicates the cloud has advanced into a temperature inversion associated with a high pressure area.

If cumulus is observed to extend vertically and grow into cumulonimbus, a thunderstorm with possible lightning and strong, gusty winds may be near. When a thunderstorm enters your area, pressure may rise. This results from the downdraft of air just ahead of heavy precipitation. The downdraft may also cause the air temperature to drop.

Fair weather cumulus with little vertical extent are good weather clouds. They indicate some instablilty close to the surface, but stable, dry conditions at higher levels. High icy cirrus clouds are also indicative of fair weather (if precipitation or storms are near, these clouds would not be visible).

It has been found that halos around the sun or moon are followed by rain about 65% of the time. Halos occur as a result of refraction of light through the ice crystals of

cirrostratus clouds. As already indicated, cirrostratus is often the first sign of an approaching storm or warm front. In the middle latitudes of the northern hemisphere, a halo with northeast, east, or southeast wind, and falling barometer, can be a fairly reliable indicator of inclement weather to follow.

Temperature and humidity

There is a good possibility of fog formation whenever the wet bulb depression is slight, or when dew point temperature is close to the wet bulb temperature. The fall in night-time temperature should be watched — if the wet bulb depression narrows, there is a greater likelihood of fog formation.

Also, an increasing dew point temperature or a narrowing of the wet bulb depression may indicate the approach of a front or storm system with inclement weather. On the other hand, a low dew point temperature and large wet bulb depression indicate very dry conditions associated with high pressure areas, good visibility, and generally settled weather conditions.

Sea and swell

The arrival or absence of swell provides a clear distinction between the advance of a local thunderstorm and an approaching well developed storm center. A threatening sky with increasing and thickening clouds, but without any swell, cannot be part of a large storm system, so any bad weather will probably be short lived. However, increasing swell from the direction of advance of the storm clouds would suggest an approaching storm with a large area of strong winds. The appearance of a heavy, rolling swell often indicates the approach of a tropical storm. Such swell are the remains of huge, decayed waves generated by the storm, but which travel faster than the storm.

The presence of swell for a long time without any significant change in weather conditions is difficult to interprete. A storm system may be approaching, but very slowly, or it may have already passed by.

WEATHER FORECASTS AND STORM WARNINGS

Always take advantage of professionally prepared weather forecasts and storm warnings, either from the NWS or from privately operated companies. Professional forecasters obtain vast amounts of data from worldwide sources, which allows them to locate and closely follow the movement of weather systems. Forecasters use numerical models which provide detailed forecast guidance out 72 hours or more from run time, and which also provide useful data out 144 hours (6 days) or more.

MARINE CLIMATOLOGICAL SUMMARIES OR ATLASES

Climatological atlases generally provide information based on conditions averaged over long periods of time, and provide an indication of the range in weather and sea conditions to be expected in a particular area. The National Geospatial-Intelligence Agency prepares marine climatological atlases for the worlds oceans, which contain much meteorological and oceanographic information. Included is information about prevailing winds, currents, atmospheric pressure, the movement of ice, etc. See http://www.nga.mil/NGAPortal/MSI.portal.

USING WEATHER CHARTS AND ANALYSES

The weather charts received via radiofacsimile provide a wealth of information allowing you to do your own forecasting. Perhaps the most useful chart is the surface analysis, which indicates the locations of Highs, lows, fronts, tropical storms, and also contains plotted surface reports, including ship reports. Your PMO can answer questions about using the surface and upper air weather analyses.

WEATHER LORE, JINGLES AND PROVERBS

Weather forecasting and supporting data acquisition programs (such as the VOS program) are a recent human advancement. Until the development of modern meteorology within the last hundred years, people relied on their own observations and experience to make weather predictions. It was known that certain atmospheric conditions were likely to produce certain kinds of weather, and this knowledge was often put into verses or proverbs. Some of the more accurate of the old sayings are shown below. All wind and compass directions are for the northern hemisphere (especially middle latitudes), and would reverse for the southern hemisphere.

Beware the bolts from north or west In south or east the bolts be best

Fairly reliable in the northern hemisphere middle latitudes, where weather generally moves from west to east. Lightning to the north or west could mean a thunderstorm coming towards you.

Rainbow to windward foul fall the day Rainbow to leeward, rain runs away

A windward rainbow indicates rain upwind, so it may begin raining soon. A rainbow behind the wind or to leeward implies the rain has probably past.

If wooly fleece deck the heavenly way Be sure no rain will mar the day

or

If fleecy white clouds cover the heavenly way no rain should mar your plans that day

Wooly fleece or fleecy white clouds refer to cumulus clouds with little vertical development (fair weather cumulus). This is sound folklore (as long as the clouds remain flat and do not grow vertically later on).

Mountains in the morning Fountains in the evening

The mountains refer to high, billowing cumulus clouds, indicative of instability and possible development of cumulonimbus clouds and a late afternoon or evening thunderstorm.

When a halo rings the moon or sun Rains approaching on the run

As already indicated, a halo around the sun or moon is followed by inclement weather about 65% of the time.

```
Short notice, soon to pass
Long notice, long will last
or
Long foretold—long last
Short notice—soon past
```

The approach of a major storm system with bad weather lasting several hours or more is revealed well in advance — by cloud formations, changing wind direction, falling atmospheric pressure, the arrival of swell, etc. However, a short lived bad weather event, such as a local thunderstorm, might only be revealed a short while ahead of time, such as from cumulus growing into cumulonimbus. This is, therefore, a fairly accurate jingle.

```
Seagull, seagull, get out on T'sand
We'll never have good weather with thee on the land
```

During fair weather, gulls scavenge at the waters edge or offshore. During stormy weather, they often fly inland and scavenge at waste dumps. However, they usually don't do this until after the storm has arrived!

```
When the glass falls low
Look out for a blow
or
When the wind backs, and the weather glass falls,
Then be on your guard against gales and squalls
```

Sound advice, because as already indicated, a steady, persistent fall in atmospheric pressure is often a good indication of foul weather to come. This is particularly true with a windshift from the west to the east, northeast or southeast.

```
Red sky at night, sailors delight
Red sky in the morning, sailors take warning
```

This is probably the most famous of all weather sayings, and is true more often than not. A red sky at sunset or early evening indicates clouds to the east, with clearing on the western horizon allowing the setting sun to be seen. Unsettled weather or stormyness may have passed or be moving out. A red sky in the morning indicates clouds to the west as the sun is rising, which may advance eastward and bring bad weather with them.

When the wind before the rain Let your topsails draw again When the rain before the wind Topsail sheets and halyards mind

A small, weak, frontal system will have a narrow band of associated rain, and wind may be more conspicuous than rain. Stronger fronts and intense depressions are surrounded by bad weather for considerable distances, and precipitation should preced the strongest wind.

Mackeral skys and mares tails Make lofty ships carry low sails

The mackeral sky is composed of cirrus and cirrocumulus clouds (which resemble scale patterns on a mackerals back). The mares tails refer to trails of ice crystals blown in streaks from cirrus clouds. These clouds may appear ahead of an approaching storm or frontal system, and can indicate strong winds aloft. If the cirrus and/or cirrocumulus thicken to cirrostratus, altostratus, and then nimbostratus, stormy conditions may be on the way. Strong winds require less sail for navigation in a rough sea.

Sound traveling far and wide A stormy day will betide

Low, dense, rainy, stratus and nimbostratus clouds trap sounds by preventing them from escaping into the atmosphere above. Voices or noise may appear louder and travel further when these clouds are present.

Frost or dew in the morning light Shows no rain before the night

The formation of frost or dew requires night time cooling which usually occurs only on very clear, calm nights. Such a night is usually followed by fair, sunny daytime weather, so inclement weather would be unlikely. However, a weather system moving very rapidly could arrive during the day, thus interfering with this proverb.

First rise after low Portends a stronger blow

The strongest, gustiest wind often does not occur until the barometer reaches it's lowest value and begins to rise. This is especially true in intense, well developed storm systems. Pressure gradients behind the low center can be very strong, giving rise to dangerous, unpredictable gales.

Glossary

3-hour observation Observations taken at 3-hourly intervals, such as 0300, 0600, 0900,

UTC, etc.

6-hour observation Observations taken a 6-hourly intervals, such as 0000, 0600, 1200, 1800

UTC. These are also known as the main synoptic times.

Alto- Cloud prefix meaning middle level.

Altocumulus White or gray patch, sheet, or layer of cloud, generally with shading,

composed of rounded masses, rolls, etc., sometimes partly fibrous, which may or may not be merged. Mainly composed of water droplets.

Altostratus Grayish or bluish sheet or layer of striated, fibrous, or uniform

appearance, having parts thin enough to see the sun, as through ground

glass.

Anemometer An instrument for measuring wind speed and direction. Typically, 3 or 4

rotating cups measure speed and a vane indicates direction.

Atmospheric pressure The pressure exerted by the atmosphere at a given point. Ships report

pressure at sea level.

Bar Unit of pressure equal to 1,000,000 dynes per square centimeter, or 1000

millibars.

Barogram A record of pressure produced by a barograph.

Barograph A recording barometer.

Barometer An instrument that measures atmospheric pressure. The aneroid baro-

meter is the standard instrument aboard ship.

Barometric pressure The atmospheric pressure value indicated by the barometer.

Barometric tendency See pressure tendency.

Beaufort wind scale A numerical scale of wind force originally designed by Admiral Francis

Beaufort in the early 19th century. Today, it consists of ranges of wind

speed with appropriate descriptions of sea state.

Bergy bit A piece of ice which has broken away from an iceberg, extending 1-5

meters above the sea surface and 100-300 square meters in area. Can

also be the remains of a melting iceberg.

Celsius temperature Same as Centigrade temperature scale where the boiling point is 100

degrees and the freezing point is 0 degrees.

Cirro- Cloud prefix meaning high level.

Cirrocumulus Thin white patch, sheet, or layer of cloud without shading, composed of

very small elements in the form of ripples, grains, etc.

Cirrostratus Transparent, whitish cloud veil of fibrous (hairlike) or smooth

appearance, often producing a halo.

Cirrus Clouds of ice crystals in the form of delicate white filaments, or white or

mostly white patches or narrow bands, with a fibrous appearance or silky

sheen.

Cloud A visible aggregate of minute water droplets or ice crystals in the

atmosphere.

Cloud heightThe height of the base of a cloud or cloud layer above the sea surface. **Cloud layer**A grouping of clouds whose bases are at approximately the same level.

Cloud type A cloud form which is identified as distinct according to the World

Meteorological Organization International Cloud Atlas.

Condensation The physical process by which a vapor becomes a liquid or a solid.

Crest The highest part of a wave.

Cumulonimbus Heavy, dense cloud, with considerable vertical extent, in the form of a

mountain or huge tower. Part of upper portion usually, but not always,

smooth or fibrous.

Cumulus Detached clouds, generally dense and with sharp outlines, developing

vertically in the form of rising mounds, domes, or towers, of which the bulging upper part often resembles a cauliflower. The sunlit parts are

brilliant white; bases can be dark and nearly horizontal.

Dew point The temperature to which the air must be cooled in order for saturation

to occur.

Drizzle Fairly uniform precipitation composed exclusively of fine drops, very

close together. Diameter less than 0.02 inch or 0.5 millimeter.

Evaporation The process of change from liquid water to water vapor.

Fog A suspension of very small water droplets in the air, reducing horizontal

visibility.

Fracto- Cloud prefix meaning torn, ragged, or scattered appearance due to strong

winds

Freak Wave A wave of great height and steepness, much higher than other waves in

the prevailing sea or swell system.

Freezing Rain Rain that freezes on impact and forms a glaze on the ground and exposed

objects.

Growler Similiar to a bergy bit, but smaller, extending less than 1 meter above the

sea surface and occupying an area of 20 square meters or less.

GustSudden brief wind speed increase followed by Iull or slackening.HailPrecipitation in the form of small balls or irregular pieces of ice.

Haze A suspension of very small, dry (non-liquid) particles in the air, such as

dust, sea salt, or soot. Results in diminished visibility. Distinguished

from fog by its dryness.

Hectopascal A unit of measure of atmospheric pressure equal to 100 newtons per

square meter. It is the numerical equivalant of a millibar.

Horizon The distant line along which the sea surface, or the earth, and the sky

appear to meet. It is the actual lower boundary of the observed sky or the

upper outline of terrestrial objects.

Hygrometer Instrument to measure humidity. The wet- and dry-bulb sling

psychrometer is a type of hygrometer.

Iceberg A piece of a glacier which has broken off and is floating in the sea.

Ice pellets Pellets or small pieces of ice, with a diameter of 5 millimeters or less,

which bounce on impact.

Icing Accumulation of ice on the ship's superstructure, from freezing

precipitation, ocean spray, supercooled fog, or cloud droplets.

Intermediate synoptic times The times of 0300, 0900, 1500, and 2100 UTC.

Knot One nautical mile per hour or approximately .5 meters per second.

Land Ice Any ice of land origin, from the freezing of fresh water or the compacting

of snow, such as an iceberg.

Lenticular A type of cloud formed in the ascending portion of an airstream, which

remains stationary while the air blows through it.

Main synoptic times The times of 0000, 0600, 1200, and 1800 UTC. Also known as the

standard synoptic times.

Millibar One one-thousandth of a bar. Numerically the same as a hectopascal. The

weight of an average column of air at sea level is 1016 millibars.

Nautical mile 1852 meters, or 6080.2 feet.

Nimbostratus Gray cloud layer, often dark, thick enough to block out the sun, which

appears diffuse by falling precipitation.

Obscured skyThe condition when the entire sky is hidden by surface-based obscuring

phenomena.

OktaUsed for the measurement of total cloud cover. One okta of cloud cover is

the equivalent of 1/8 of the sky covered with cloud.

Period See wave period.

PMO Port meteorological officer.

Precipitation All types of condensed water vapor, whether liquid, freezing, or frozen,

which fall out of the atmosphere to the earth's surface.

Pressure See atmospheric pressure.

Pressure changeThe net difference between the pressure at the beginning and ending of a

specified interval of time.

Pressure characteristic The indication of how the pressure has been changing during the 3-hour

period preceding an observation; i.e. decreasing then increasing, same

pressure, or lower than 3-hours ago.

Pressure tendency The character and amount of atmospheric pressure change during the 3-

hour period preceding an observation.

Psychrometer An instrument for measuring the moisture content of the air by use of a

wet- "and" dry- bulb thermometer; a type of hygrometer.

Rain Liquid precipitation that remains in the liquid state upon impact with the

ground or other exposed objects.

Remarks Plain language data added after the last group of the weather message to

report significant information not provided for in the main body of the

report.

Ripple A small wavelet which forms at wind speeds of 1-3 knots.

Saturation The stage where the water content of the atmosphere reaches the

maximum possible under the existing environmental conditions.

Sea Locally generated waves produced by the wind, and described by their

period and height.

Sea ice lce formed from the freezing of the sea surface.

Sea-level pressureThe atmospheric pressure at mean sea level, either directly measured, or

empirically determined from the observed station pressure.

Sleet Raindrops that have passed through a freezing layer of air and frozen or

partially frozen. Same as ice pellets.

Sling psychrometer A type of hygrometer with two thermometers, which is whirled to

determine air and wet bulb temperatures. The bulb of one is kept moist

by a piece of wet muslin.

Snow Precipitation of ice crystals, mostly branched in star shapes.

Snow grains Very small, white, opaque grains of ice, with a diameter of less than 1

millimeter. Frozen drizzle.

Snow pellets White, opaque grains of ice, with a diameter of 2-5 millimeters.

Special observation An unscheduled or special observation taken to report significant

changes in one or more of the observed elements since the last recorded

observation.

Squall A sudden increase in wind speed of at least 15 knots which is sustained

at 20 knots or more for at least 1 minute.

Standard barometer A barometer of very high accuracy used to calibrate other barometers.

NWS PMOs use hand- held standard digital barometers to calibrate

shipboard barometers.

Standard synoptic times The times of 0000, 0600, 1200, and 1800 UTC. Also known as the main

synoptic times.

Station pressure The atmospheric pressure at barometer height, normally on the bridge.

Barometers aboard NWS Voluntary Observing Ships are calibrated, when

possible, to read sea-level pressure.

Storm Sustained wind of 48-55 knots (defined by the WMO as Beaufort

Force 10).

Strato- Cloud prefix referring to cloud sheets or layers.

Stratocumulus Gray or whitish patch, sheet, or layer of cloud, almost always with dark

parts, with non- fibrous rounded masses or rolls, which may or may not

be merged.

Stratus Generally gray cloud layer with a fairly uniform base, which may produce

drizzle or snow grains.

Surface observation Surface weather observations taken in accordance with World

Meteorological Organization regulations, containing those weather

elements most important for forecasting and later use.

Swell Ocean waves which have travelled beyond the generating area. They have

longer periods and are more regular than seas.

Synoptic code Rules and procedures established by the World Meteorological

Organization for encoding weather observations.

Temperature A measure of the hotness or coldness of the air as measured by a

suitable instrument, using a defined temperature scale.

Trough The lowest part of a wave.

True direction Direction measured in degrees clockwise from true north, where north is

0 degrees.

Variable wind A condition when the wind direction fluctuates by 60 ° or more during the

period of observation and the wind speed is greater than 10 knots.

VisibilityThe greatest horizontal distance at which selected objects can be seen

and identified.

Visibility reference Selected objects at known distances used to determine visibility.

Voluntary Observing Program of the WMO and NWS to manage weather reporting

Ship (VOS) program by ships at sea and on the Great Lakes.

Water vapor The gaseous form of water.

Wave height Distance from trough to crest, averaged for the better formed waves in the

center of the wave group.

Wave length Distance from trough to trough or crest to crest for adjacent waves.

Wave period Time, in seconds, for the passage of successive wave crests. Normally

computed as an average value for several waves.

Weather The individual and combined atmospheric phenomena used to describe

the local atmospheric conditions at the time of observation.

Whitecap The breaking crest of a wave, usually white and frothy.

Wind The horizontal motion of the air past a given point.

Wind character

The measure of the variability of the wind speed in terms of gusts and

squalls.

Wind direction

The true direction from which the wind is blowing at a given location.

Wind shift

A change in the average wind direction of 45° or more which takes place

in less than 15 minutes with wind speeds greater than 10 knots.

Wind speedThe rate at which the air is moving horizontally past a given point.

Vessels usually estimate wind speed by relating the state of the sea to the

Beaufort Scale of wind force.

Appendix A

Observing Forms and Supplies

BOOKLETS AND MANUALS

NWS Observing Handbook No. 1 World Wide Marine Radiofacsimile Broadcast Schedules Guide to Sea State, Wind and Clouds

OBSERVING FORMS

Ship's Weather Observations Barogram

Appendix B

Conversion Factors and Equivalents

LENGTH

```
1 foot = .3048 meters
1 centimeter = 10 millimeters = .394 inches = .01 meters
1 meter = 100 centimeters = 3.2808 feet = 39.37 inches = 1.09 yards = .547 fathoms
```

1 kilometer = 1000 meters = 3280.8 feet = .54 nautical miles = .621 statute miles

1 degree latitude = 111.1 kilometers

1 statute mile = 1.6093 kilometers

SPEED

```
1 knot (nautical mile/hour) = 1.15 statute miles/hour = .51 meters/sec
1 meter/sec = 2.24 statute miles/hour = 1.94 knots
1 centimeter/second = 1.97 feet per minute
```

TEMPERATURE

```
Degrees Celsius = Degrees Centigrade
Celsius = 5/9(Fahrenheit - 32)

or
Celsius = (Fahrenheit - 32)/1.8
```

Fahrenheit = 1.8(Celsius) + 32

or

Fahrenheit = 1.8(Celsius + 40) - 40

PRESSURE

```
1 millimeter mercury = .03937 inches = 1.3332 millibars

1 inch mercury = 25.4 millimeters = 33.8640 millibars

1 millibar = .02953 inches = .75006 millimeters

millibars = inches x 33.865

inches = millibars/33.864

Standard Atmosphere: vertical pressure change is .037 millibars/foot

(.1214 millibars/meter)
```

AREA

```
1 square centimeter = .155 square inches
1 square meter = 10.8 square feet
1 square kilometer = .386 square statute miles = .292 square nautical miles
```

,											
	Fahrenheit to Celsius Temperatures										
°F.	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	
	°C.	°C.	°C.	°C.	°C.	°C.	°C.	°C.	°C.	°C.	
+110	+43.3	+43.4	+43.4	+43.6	+43.6	+43.6	+43.7	+43.7	+43.8	+43.8	
109	42.8	42.8	42.9	42.9	43.0	43.1	43.1	43.2	43.2	43.3	
108	42.2	42.3	42.3	42.4	42.4	42.5	42.6	42.6	42.7	42.7	
107	41.7	41.7	41.8	41.8	41.9	41.9	42.0	42.1	42.1	42.2	
106	41.1	41.2	41.2	41.3	41.3	41.4	41.4	41.5	41.6	41.6	
+105	+40.6	+40.6	+40.7	+40.7	+40.8	+40.8	+40.9	+40.9	+41.0	+41.1	
104	40.0	40.1	40.1	40.2	40.2	40.3	40.3	40.4	40.4	40.5	
103	39.4	39.5	39.6	39.6	39.7	39.7	39.8	39.8	39.9	39.9	
102	38.9	38.9	39.0	39.1	39.1	39.2	39.2	39.3	39.3	39.4	
101	38.3	38.4	38.4	38.5	38.6	38.6	38.7	38.7	38.8	38.8	
+100	+37.8	+37.8	+37.9	+37.9	+38.0	+38.1	+38.1	+38.2	+38.2	+38.3	
99	37.2	37.3	37.3	37.4	37.4	37.5	37.6	37.6	37.7	37.7	
98	36.7	36.7	36.8	36.8	36.9	36.9	37.0	37.1	37.1	37.2	
97	36.1	36.2	36.2	36.3	36.3	36.4	36.4	36.5	36.6	36.6	
96	35.6	35.6	35.7	35.7	35.8	35.8	35.9	35.9	36.0	36.1	
+95	+35.0	+35.1	+35.1	+35.2	+35.2	+35.3	+35.3	+35.4	+35.4	+35.5	
94	34.4	34.5	34.6	34.6	34.7	34.7	34.8	34.8	34.9	34.9	
93	33.9	33.9	34.0	34.1	34.1	34.2	34.2	34.3	34.3	34.4	
92	33.3	33.4	33.4	33.5	33.6	33.6	33.7	33.7	33.8	33.8	
91	32.8	32.8	32.9	32.9	33.0	33.1	33.1	33.2	33.2	33.3	
+90	+32.2	+32.3	+32.3	+32.4	+32.4	+32.5	+32.6	+32.6	+32.7	+32.7	
89	31.7	31.7	31.8	31.8	31.9	31.9	32.0	32.1	32.1	32.2	
88	31.1	31.2	31.2	31.3	31.3	31.4	31.4	31.5	31.6	31.6	
87	30.6	30.6	30.7	30.7	30.8	30.8	30.9	30.9	31.0	31.1	
86	30.0	30.1	30.1	30.2	30.2	30.3	30.3	30.4	30.4	30.5	
+85	+29.4	+29.5	+29.6	+29.6	+29.7	+29.7	+29.8	+29.8	+29.9	+29.9	
84	28.9	28.9	29.0	29.1	29.1	29.2	29.2	29.3	29.3	29.4	
83	28.3	28.4	28.4	28.5	28.6	28.6	28.7	28.7	28.8	28.8	
82	27.8	27.8	27.9	27.9	28.0	28.1	28.1	28.2	28.2	28.3	
81	27.2	27.3	27.3	27.4	27.4	27.5	27.6	27.6	27.7	27.7	
+80	+26.7	+26.7	+26.8	+26.8	+26.9	+26.9	+27.0	+27.1	+27.1	+27.2	
79	26.1	26.2	26.2	26.3	26.3	26.4	26.4	26.5	26.6	26.6	
78	25.6	25.6	25.7	25.7	25.8	25.8	25.9	25.9	26.0	26.1	
77	25.0	25.1	25.1	25.2	25.2	25.3	25.3	25.4	25.4	25.5	
76	24.4	24.5	24.6	24.6	24.7	24.7	24.8	24.8	24.9	24.9	
+75	+23.9	+23.9	+24.0	+24.1	+24.1	+24.2	+24.2	+24.3	+24.3	+24.4	
74	23.3	23.4	23.4	23.5	23.6	23.6	23.7	23.7	23.8	23.8	
73	22.8	22.8	22.9	22.9	23.0	23.1	23.1	23.2	23.3	23.3	
72	22.2	22.3	22.3	22.4	22.4	22.5	22.6	22.6	22.7	22.7	
71	21.7	21.7	21.8	21.8	21.9	21.9	22.0	22.1	22.1	22.2	
+70	+21.1	+21.2	+21.2	+21.3	+21.3	+21.4	+21.4	+21.5	+21.6	+21.6	
69	20.6	20.6	20.7	20.7	20.8	20.8	20.9	20.9	21.0	21.1	
68	20.0	20.1	20.1	20.2	20.2	20.3	20.3	20.4	20.4	20.5	
67	19.4	19.5	19.6	19.6	19.7	19.7	19.8	19.8	19.8	19.9	
66	18.9	18.9	19.0	19.1	19.1	19.2	19.2	19.3	19.3	19.4	
+65	+18.3	+18.4	+18.4	+18.5	+18.6	+18.6	+18.7	+18.7	+18.8	+18.8	
64	17.8	17.8	17.9	17.9	18.0	18.1	18.1	18.2	18.2	18.3	
63	17.2	17.3	17.3	17.4	17.4	17.5	17.6	17.6	17.7	17.7	
62	16.7	16.7	16.8	16.8	16.9	16.9	17.0	17.1	17.1	17.2	
61	16.1	16.2	16.2	16.3	16.3	16.4	16.4	16.5	16.6	16.6	

Fahrenheit to Celsius Temperatures										
°F.	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
	°C.									
+60	+15.6	+15.6	+15.7	+15.7	+15.8	+15.8	+15.8	+15.9	+16.0	+16.1
59	15.0	15.1	15.1	15.2	15.2	15.3	15.3	15.4	15.4	15.5
58	14.4	14.5	14.6	14.6	14.7	14.7	14.8	14.8	14.9	14.9
57	13.9	13.9	14.0	14.1	14.1	14.2	14.2	14.3	14.3	14.4
56	13.3	13.4	13.4	13.5	13.6	13.6	13.7	13.7	13.8	13.8
+55	+12.8	+12.8	+12.9	+12.9	+13.0	+13.1	+13.1	+13.2	+13.2	+13.3
54	12.2	12.3	12.3	12.4	12.4	12.5	12.6	12.6	12.7	12.7
53	11.7	11.7	11.8	11.8	11.9	11.9	12.0	12.1	12.1	12.2
52	11.1	11.2	11.2	11.3	11.3	11.4	11.4	11.5	11.6	11.6
51	10.6	10.6	10.7	10.7	10.8	10.8	10.9	10.9	11.0	11.1
+50	+10.0	+10.1	+10.1	+10.2	+10.2	+10.3	+10.3	+10.4	+10.4	+10.5
49	9.4	9.5	9.6	9.6	9.7	9.7	9.8	9.8	9.9	9.9
48	8.9	8.9	9.0	9.1	9.1	9.2	9.2	9.3	9.3	9.4
47	8.3	8.4	8.4	8.5	8.6	8.6	8.7	8.7	8.8	8.8
46	7.8	7.8	7.9	7.9	8.0	8.1	8.1	8.2	8.2	8.3
+45	+7.2	+7.3	+7.3	+7.4	+7.4	+7.5	+7.6	+7.6	+7.7	+7.7
44	6.7	6.7	6.8	6.8	6.9	6.9	7.0	7.1	7.1	7.2
43	6.1	6.2	6.2	6.3	6.3	6.4	6.4	6.5	6.6	6.6
42	5.6	5.6	5.7	5.7	5.8	5.8	5.9	5.9	6.0	6.1
41	5.0	5.1	5.1	5.2	5.2	5.3	5.3	5.4	5.4	5.5
+40	+4.4	+4.5	+4.6	+4.6	+4.7	+4.7	+4.8	+4.8	+4.9	+4.9
39	3.9	3.9	4.0	4.1	4.1	4.2	4.2	4.3	4.3	4.4
38	3.3	3.4	3.4	3.5	3.6	3.6	3.7	3.7	3.8	3.8
37	2.8	2.8	2.9	2.9	3.0	3.1	3.1	3.2	3.2	3.3
36.	2.2	2.3	2.3	2.4	2.4	2.5	2.6	21.6	2.7	2.7
+35	+1.7	+1.7	+1.8	+1.8	+1.9	+1.9	+2.0	+2.1	+2.1	+2.2
34	+1.1	+1.2	+1.2	+1.3	+1.3	+1.4	+1.4	+1.5	+1.6	+1.6
33	+0.6	+0.6	+0.7	+0.7	+0.8	+0.8	+0.9	+0.9	+1.0	+1.1
32	0.0	+0.1	+0.1	+0.2	+0.2	+0.3	+0.3	+0.4	+0.4	+0.5
31	-0.6	-0.5	-0.4	-0.4	-0.3	-0.3	-0.2	-0.2	-0.1	-0.1
+30	-1.1	-1.1	-1.0	-0.9	-0.9	-0.8	-0.8	-0.7	-0.7	-0.6
29	-1.7	-1.6	-1.6	-1.5	-1.4	-1.4	-1.3	-1.3	-1.2	-1.2
28	-2.2	-2.2	-2.1	-2.1	-2.0	-1.9	-1.9	-1.8	-1.8	-1.7
27	-2.8	-2.7	-2.7	-2.6	-2.6	-2.5	-2.4	-2.4	-2.3	-2.3
26	-3.3	-3.3	-3.2	-3.2	-3.1	-3.1	-3.0	-2.9	-2.9	-2.8
+25	-3.9	-3.8	-3.8	-3.7	-3.7	-3.6	-3.6	-3.5	-3.4	-3.4
24	-4.4	-4.4	-4.3	-4.3	-4.2	-4.2	-4.1	-4.1	-4.0	-3.9
23	-5.0	-4.9	-4.9	-4.8	-4.8	-4.7	-4.7	-4.6	-4.6	-4.5
22	-5.6	-5.5	-5.4	-5.4	-5.3	-5.3	-5.2	-5.2	-5.1	-5.1
21	-6.1	-6.1	-6.0	-5.9	-5.9	-5.8	-5.8	-5.7	-5.7	-5.6
+20	-6.7	-6.6	-6.6	-6.5	-6.4	-6.4	-6.3	-6.3	-6.2	-6.2
19	-7.2	-7.2	-7.1	-7.1	-7.0	-6.9	6.9	-6.8	-6.8	-6.7
18	-7.8	-7.7	-7.7	-7.6	-7.6	-7.5	-7.4	-7.4	-7.3	-7.3
17	-8.3	-8.3	-8.2	-8.2	-8.1	-8.1	-8.0	-7.9	-7.9	-7.8
16	-8.9	-8.8	-8.8	-8.7	-8.7	-8.6	-8.6	-8.5	-8.4	-8.4
+15	-9.4	-9.4	-9.3	-9.3	-9.2	-9.2	-9.1	-9.1	-9.0	-9.0
14	-10.0	-9.9	-9.9	-9.8	-9.8	-9.7	-9.7	-9.6	-9.6	-9.5
13	-10.6	-10.5	-10.4	-10.4	-10.3	-10.3	-10.2	-10.2	-10.1	-10.1
12	-11.1	-11.1	-11.0	-10.9	-10.9	-10.8	-10.8	-10.7	-10.7	-10.6
11	-11.7	-11.6	-11.6	-11.5	-11.4	-11.4	-11.3	-11.3	-11.2	-11.2

Appendix C

Interpretation of Weather Map Symbols

CODE FIGURES AND SYMBOLS

Present Weather ww, Cloud Types $C_LC_MC_H$, Past Weather W_1W_2 , Sky Cover N, Pressure Characteristic a.


ww								cL	c _M	СН	W ₁ W ₂	N	a		
$^{\circ\circ}$	Ö	02	03	~~	05	S	\$/1	°8	(S)	0	0	0	0	°O	^
=	ΞΞ	==	13	•)•((•)	17 	¹⁸ ∀)(1		1	1	'
٠]	•]	*]	23 *	24 ∼]	²⁵ ♥	26 ♥]	27 0]	²⁸ ≡]	²⁹ [ζ]	2	2	2	2	²	2 /
30 S+	31 - 5 •	32 S -	33 -5 -	34 S •	35 S-	36	37	38	39	<u>*</u>	3 ~	3	35/4	³ ①	3 🗸
(≡)	41	42	43	==	45	1=	 =	48	49	\Q	4	٠_>	=	•	4—
50	51	52	53	54	55	⁵⁶ ∼	57 (~)	58	59	5 ~	تک	2	5	•	5
•	81	62	63	64	65	·~	67	68 *	69 *	6	°~	2	8	•	• \
70 *	71 * *	72 * *	73 * * *	74 * *	75 * **	76	77 -&-	78 #	79 <u>^</u>	7	′€	7 2\$	7	O	7
*	⁸¹ ♥	⁸² ♥	83 V	* ₹	⁸⁵ *	* *	87	**	89	ُڬ	[*] M	s	* ▽	•	8 ^
90	91 [7]•	⁹² 7]:	93 \ */ ₆	*	95 	96	97 **	98 	\$9 {}	ٔ	6	ا	"	⊗	9

SYMBOLS FOR FRONTS, ISOBARS, ETC.

WARM FRONT		INSTABILITY LINE	••
WARM FRONT ABOVE THE SURFACE		TROWAL (trough of warm air aloft)	777
COLD FRONT		CENTRE OF HIGH PRESSURE	H
COLD FRONT ABOVE THE SURFACE		CENTRE OF LOW PRESSURE	L
OCCLUDED FRONT		ISOBARS (lines joining places of equal pressure)	
QUASI-STATIONARY FRONT AT THE SURFACE		TYPE OF AIR OVER REGION	MARITIME POLAR
QUASI-STATIONARY FRONT ABOVE THE SURFACE	\bigcirc	AREA OF CONTINUOUS PRECIPITATION	

SAMPLE WIND PLOT



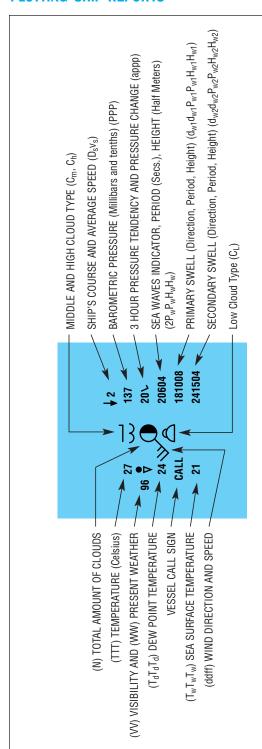

SAMPLE MESSAGE DECODED:

8 knots, Sea Surface Temperature 21°C, Sea Waves Period 6 seconds, height 2 meters (1 half meters), eighths, C_L cloud cumulus, C_W cloud altocumulus, C_H cloud cirrus, Ships course South, average speed Visibility 2 miles; Wind from 230°, 25 knots; 27°C, Dew Point Temperature 24°C, Sea Level Pressure 1013.7 millibars, Pressure falling, then rising. Net 3 Hour pressure change minus 2 millibars, Present Primary Swell from 180° (South), period 10 seconds, height 4 meters, Secondary Swell running from Weather—rain showers, Past W eather—showers and drizzle, Fraction of sky cover by C 240°, period 15 seconds, height 2 meters, total cloud amount 4 eighths.